



Contractor Select™ ESXF LED

Floodlights Adjustable+Switchable+Photocell

The Lithonia Lighting® ESXF LED floodlight is a general-purpose flood that offers a wide selection of options and flexibility. Easy access to adjustable lumen output, color switching, and a selectable photocell turns the ESXF into the fixture you need on the spot. With its wide flood (7x7) distribution and DLC performance, the ESXF is a cost-effective solution, great for illuminating yards, driveways, signage, patios, warehouses, and security applications.

FEATURES:

- Five sizes deliver 1,500 up to 50,000 lumens
- Three power levels of adjustable lumen output. Switchable CCT(30K/40K/50K) offers warm, cool and daylight in a single fixture
- Standard photocell can be turned on or off
- IP66 rated, Die-cast aluminum housing
- Two popular mounting options included
- up to 173 LPW

Catalog Number
Notes
Type



Catalog Number	Adjustable Lumen Output ALO	Switchable CCT SWW2	Dusk-to-Down Operation PE	Input Voltage	Included Mounting Options	CRI
ESXF1 PO SWW2 THK DDB	2500L			120-277V	Knuckle Only, mounting plate	
ESXF1 ALO SWW2 KY DDB	1500L 3000L 5000L			120-277V	Knuckle & Yoke, mounting plate	
ESXF2 ALO SWW2 KY DDB	3500L 5500L 7500L			120-277V	Knuckle & Yoke, mounting plate	
ESXF3 ALO SWW2 YS DDB				120-277V	Yoke & SlipFitter	
ESXF3 ALO SWW2 UVOLT YS DDB	8500L 10500L 14000L	Switchable 3000K, 4000K, 5000K	Included Standard, Selectable On/Off	120-347V	Yoke & SlipFitter	80CRI
ESXF4 ALO SWW2 YS DDB	15000L 18000L 20000L			120-277V	Yoke & SlipFitter	
ESXF4 ALO SWW2 UVOLT YS DDB				120-347V	Yoke & SlipFitter	
ESXF5 ALO SWW2 UVOLT YS DDB	30000L 40000L 50000L			120-347V	Yoke & SlipFitter	
ESXF5 ALO SWW2 XVOLT YS DDB	30000L 40000L 50000L			277-480V	Yoke & SlipFitter	

More configurations are available. [Click here](#) or visit www.acuitybrands.com and search for ESXF LED.

ESXF Stock Configurations

Catalog Number	UPC	CI Code	Number of fixtures per pallet	Traditional Replacement
ESXF1 PO SWW2 THK DDB	00196182393051	*276AL6	400	150W Quartz or 75W HID
ESXF1 ALO SWW2 KY DDB	00196182393204	*276ALH	400	500W Quartz or 150W HID
ESXF2 ALO SWW2 KY DDB	00196182393242	*276ALU	360	500W Quartz or 175W HID
ESXF3 ALO SWW2 YS DDB	00196182393266	*276ALW	144	250W HID
ESXF3 ALO SWW2 UVOLT YS DDB	00196182393273	*276AM0	144	250W HID
ESXF4 ALO SWW2 YS DDB	00196182393280	*276AM2	144	400W HID
ESXF4 ALO SWW2 UVOLT YS DDB	00196182393297	*276AM4	144	400W HID
ESXF5 ALO SWW2 UVOLT YS DDB	00197589243710	*283G2F	32	1000W HID
ESXF5 ALO SWW2 XVOLT YS DDB	00197589243734	*283G2G	32	1000W HID

Accessories: Order as separate catalog number.
 ESXF PO and ESXF1 yoke mount accessory
 *276ARA ESXF1YK DDB
 ESXF5 upper/bottom visor accessory
 *283G2K ESXF5UBV DDB
 Click here to visit [Additional mounting brackets](#).

CONTRACTOR SELECT ESXF SERIES LED


Page 1 of 5



ESXF4 yoke mount

	Lumen Output	Input Wattage	CCT/80CRI	Delivered Lumens	Lumens Per Watt @ 4000K, 80CRI
ESXF4	16,000L	111W	3000K	15,508	148
			4000K	16,487	
			5000K	16,366	
	18,000L	124W	3000K	17,274	148
			4000K	18,365	
			5000K	18,230	
20,000L	150W	3000K	19,583	139	
		4000K	20,819		
		5000K	20,666		

ESXF4

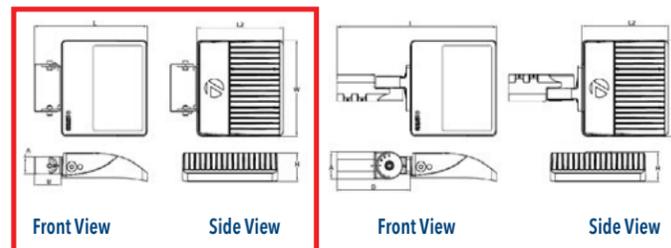


Luminaire	Length (L)	Width (W)	Height (H)	Yoke/Knuckle		L2	Weight
				A (Height)	B (Length)		
Dimensions in inches (centimeters)							
ESXF4 SWW2 ALO YS (Yoke)	12.54" (31.8cm)	10.54" (26.8cm)	3.12" (7.9cm)	1.77" (4.5cm)	2.99" (7.6cm)	9.55" (24.3cm)	8.17 lbs (3.706 kg)
ESXF4 SWW2 ALO YS (Slipfitter)	17.66" (44.8cm)	10.54" (26.8cm)	3.22" (8.2cm)	2.95" (7.5cm)	8.11" (20.6cm)	9.55" (24.3cm)	8.43 lbs (3.824 kg)

EPA Data

	Angle of Tilt	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°
ESXF1	Project Area(ft²)	0.078	0.114	0.15	0.183	0.21	0.231	0.246	0.25	0.25	0.25
	EPA(ft²)	0.0936	0.1368	0.18	0.2196	0.252	0.2772	0.2952	0.3	0.3	0.3
ESXF2	Project Area(ft²)	0.09	0.133	0.182	0.226	0.263	0.293	0.314	0.325	0.326	0.32
	EPA(ft²)	0.108	0.1596	0.2184	0.2712	0.3156	0.3516	0.3768	0.39	0.3912	0.384
ESXF3	Project Area(ft²)	0.23	0.285	0.383	0.471	0.548	0.608	0.65	0.673	0.674	0.66
	EPA(ft²)	0.276	0.342	0.4596	0.5652	0.6576	0.7296	0.78	0.8076	0.8088	0.792
ESXF4	Project Area(ft²)	0.23	0.365	0.494	0.609	0.707	0.785	0.84	0.869	0.87	0.81
	EPA(ft²)	0.276	0.438	0.5928	0.7308	0.8484	0.942	1.008	1.0428	1.044	0.972
ESXF5	Project Area(ft²)	0.4	0.5	0.79	1.09	1.36	1.61	1.8	1.94	2.01	2.01
	EPA(ft²)	0.48	0.6	0.948	1.308	1.632	1.932	2.16	2.328	2.412	2.412

*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.



Specifications

INTENDED USE:

The ESXF LED floodlight is designed to provide a cost effective, energy-efficient solution for the one-for-one replacement of existing traditional sources ranging from 150W quartz up to 1000W metal halide. ESXF is well suited for general illumination of parking lots, signage, yards, walkways, landscaping, and other floodlighting applications. ESXF luminaires deliver a uniform, wide flood 7x7 light distribution.

CONSTRUCTION:

The ESXF LED floodlight features sealed die-cast aluminum body and is IP66 listed to withstand moisture and the elements for years to come.

ELECTRICAL:

ESXF features adjustable lumen output include, low, medium, and high. (ESXF PO static only). Switchable CCT includes between 3000K(warm), 4000K(neutral) or 5000K(daylight) and a selectable dusk to dawn photocell that automatically turns the fixture on in the evening and off the next morning.

Standard 6kV surge protection tested in accordance to ANSI/IEEE C62.41.2)Category C. ESXF LED luminaires use MVOLT (120-277V) as well as UVOLT (120-347V) or XVOLT (277-480V) on select models. Adjustable lumen output is achieved with 0-10V continuous dimming capable drivers, ensuring system power factor>90% and THD <20%. L90 ≥ 36,000 hours at 25C ambient.

INSTALLATION:

ESXF1 and ESXF2 ship with 1/2" NPS threaded knuckle mount factory installed and can be mounted to conduit bodies or to 4" electrical boxes using the provided round mounting plate. Yoke mounts can be easily changed in the field to mount to any solid surfaces (ESXF1 PO yoke purchased separately).

ESXF3, ESXF4, and ESXF5 include a yoke mounting for solid surface mounting and an integral slipfitter that mates with standard 2 3/8" tenons for pole-top mounting. All models ship standard with 18" 50 cord.

LISTINGS:

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. Rated for -40°C minimum ambient.

WARRANTY:

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



Factory settings
 Lumen Output: High
 CCT: 4000K
 Photocell: On



FENTRESS ARCHITECTS



MANUFACTURER SPECIFICATIONS
 LIGHT FIXTURE

December 13, 2024
 Navy Federal Credit Union
 Generator Project
 Vienna, VA