


Product Categories / Lighting / Outdoor Lighting / Parking Garage & Canopy Lights / Low-Profile Canopy Light: LED, 4,250 Im...



Low-Profile Canopy Light:  
LED, 4,250 Im\_6,000  
Im\_8,350 Im,  
3000K/4000K/5000K, 60 W  
Fixture Watt

Item 60TZ66  
Mfr. Model GC60-SCT-G2-SM-5-10-BZ

Web Price   
\$197.65 / each

Qty

1

Add to Cart

☒ Ship

☐ Pickup

Expected to arrive Mon. Sep 15.

Ship to 30301 | [Change](#)

Shipping Weight 5.15 lbs  
[Ship Availability Terms](#)

Add to List

Product Details

Catalog Page [482](#)

Brand STONCO

Manufacturer Part Number GC60-SCT-G2-SM-5-10-BZ

Color Selectable Selectable

Color Temperature  
3000K  
4000K  
5000K

Fixture Shape Square

Fixture Wattage 60 W

High Pressure Sodium Wattage Equivalency 50 W; 70 W; 100 W

Housing Color Bronze

Housing Material Aluminum

IESNA Light Distribution Type V


Incandescent Wattage Equivalency 60 W


Light Output  
4,250 Im  
6,000 Im  
8,350 Im

Light Technology LED

Lumen Selectable Selectable

Compliance & Restrictions

 This item is restricted for international sale.

 Chat with an Agent

Metal Halide Wattage Equivalency

50 W

70 W

100 W

NEMA Light Distribution **NEMA 5x5**

Overall Depth **9-1/2 in**

Overall Height **3-1/4 in**

Overall Width **9-1/2 in**


Voltage **120 to 347V AC**

UNSPSC **39111521**

Country of Origin **Vietnam (subject to change)**

Product Description

LED low-profile parking garage and canopy lights, also known as flush-mount canopy lights, feature a slim, compact design with a height of 5" or less to suit applications requiring more clearance, like drive-throughs, building entryways, or parking structures with low ceilings. Their LED lamps reach full power instantly and are cleaner, brighter, longer-lasting, and more energy-efficient than fixtures with incandescent lamps. They also produce very little heat and can withstand temperature changes and humidity.

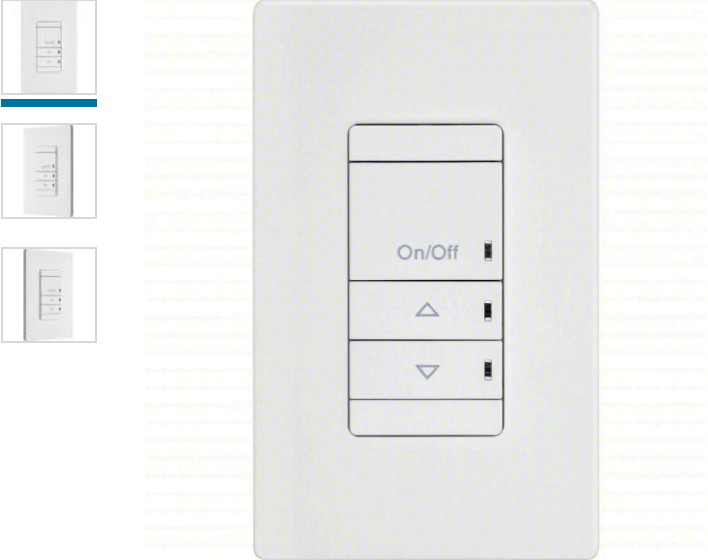

LITHONIA LIGHTING Lighting Dimmer:  
LED, 3-Way, 120 to 277V AC, 4.3 A  
(277V AC)/6.7 A (120V AC)

Item 802NG2      Mfr. Model SPODMRA MWO D WH

Web Price *i*  
**\$86.38** / each

Qty

1

Add to Cart

☒ Ship

☐ Pickup

Expected to arrive **Mon. Sep 15.**

Ship to 22180 | [Change](#)

Shipping Weight **0.38 lbs**  
[Ship Availability Terms](#)

Add to List

Product Details

Catalog Page [477](#)

Brand **LITHONIA LIGHTING**

Manufacturer Part Number **SPODMRA MWO D WH**

Series **SPODMRA**

Switch Style **Push Button On/Off, Push Button Dimming**

Switch Type **3-Way**

Operating Voltage **120 to 277V AC**

Lighting Technology **LED**

Load Rating @ 120V AC **800W (LED)**

Load Rating @ 277V AC **1200W (LED)**

Neutral Required **No**

Color **White**

Ballast Type **Electronic Ballast; Standard Ballast; Tungsten Ballast**

Compatible with Series **WSXA MWO**

Current Rating **4.3 A (277V AC); 6.7 A (120V AC)**

Dimming Type **Full Continuous Dimming**

Dimming Method **0-10V**

Horsepower Rating **1/4 hp**

Includes Wall Plate **Wall Plate Included**

Maximum Operating Temperature **140 °F**

Minimum Operating Temperature **32 °F**

Number of Gangs **1**

Overall Height **2.74 in**

Overall Width **1.68 in**

Overall Depth **1.63 in**

Rated Frequency **50/60 Hz**

Standards **BAA; C-UL-US; CA Title 24; cUL; ROHS**

Sub-brand **Contractor Select**

UNSPSC **0**

Country of Origin **Mexico (subject to change)**

Product Description

0-10V dimmers pair with 0-10V ballasts and drivers to control light output. Their DC voltage signal allows varying the brightness through a range from 0% to 100%.

Documents

 [Specification Sheet](#)

 [Installation Guide](#)