

CHANNEL LETTERS ON BACKER

P02 - FACE-LIT - OPTION 1

QTY: 1

Attachment 04

Article 600 Statements on grounding & bonding and the disconnect illustrations


L37 "This sign is intended to be installed in accordance with the requirements of Article 600 of National Electrical Code and/ or other applicable local codes. This includes proper grounding and bonding of the sign"

L38 "The location of the disconnect switch after installation shall comply with Article 600, 6(A) (1) of the National Electrical Code."



Existing

E02

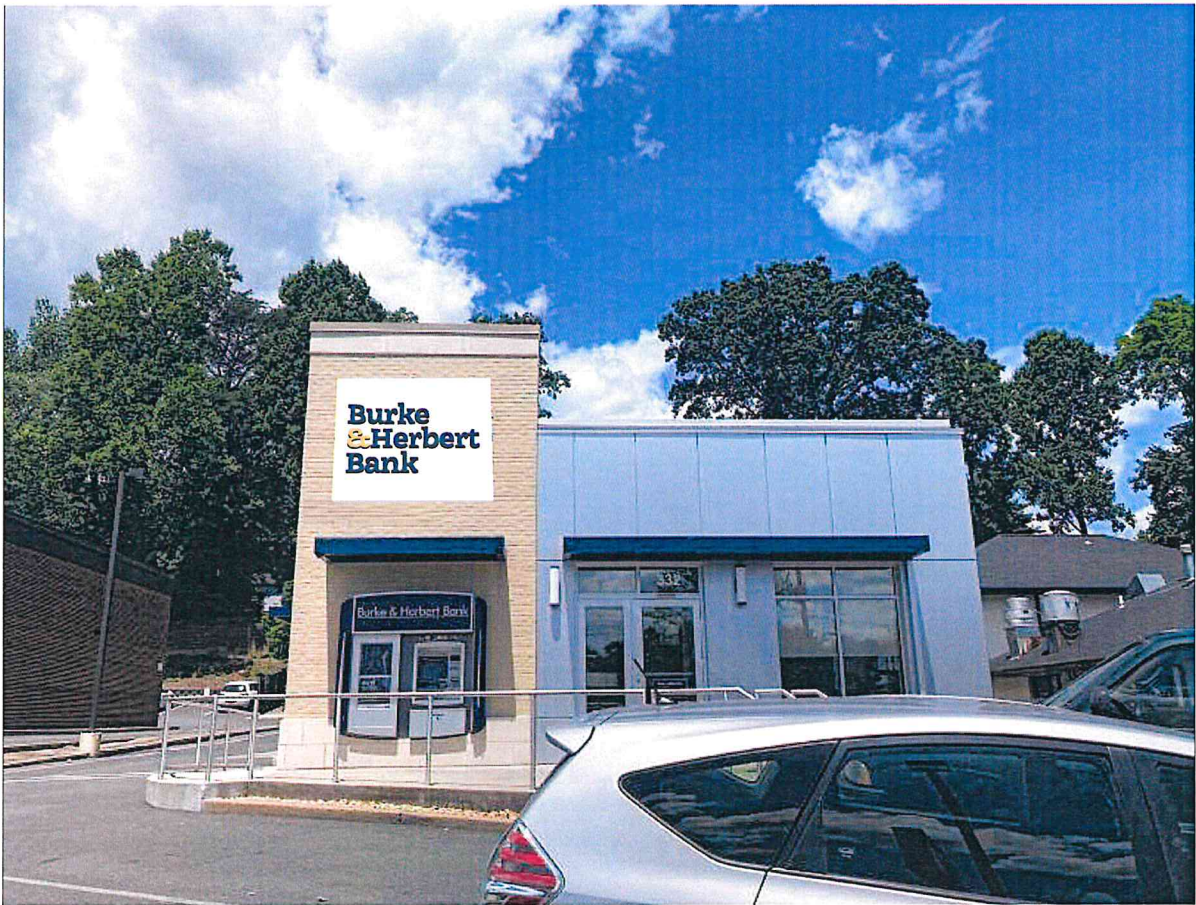

Proposed

P02

Specifications

- Black returns and trim caps
- ~~Perforated~~ Vinyl to achieve desired color
- Fabricated aluminum backer

Ampersand Face

Letter Faces

Return Trim cap

Backer


Virginia Gold  
C=16 M=25 Y=69 K=0

Virtus Blue  
Pantone 534c


Black

White

LED Temperature 3000K  
Lumens - 150

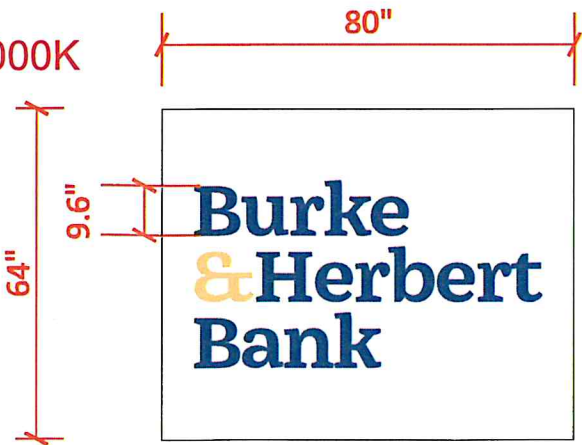

Scale: 1/4" = 1'-0"

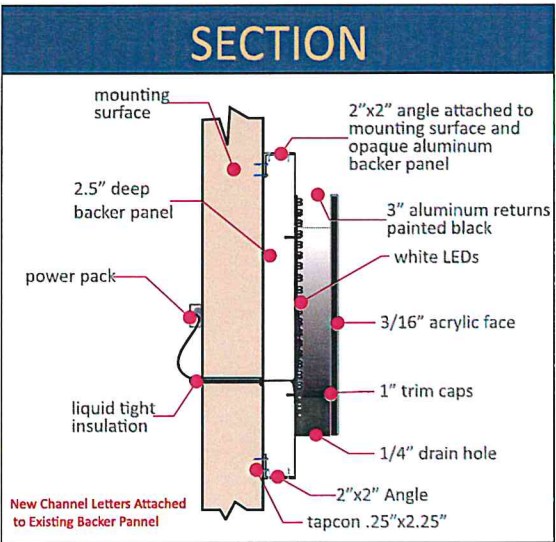



ENTRANCE DOOR VINYL

P07  
QTY: 1



Existing E07



Proposed P07

**Specifications**  
Materials High Performance White Vinyl, Blue, Gold  
Process Graphics Plotted  
Mounting First Surface

Text	Strip	Ampersand
		
White	Ink Blue 8800-183	Gold Metallic 8800-91

1'-8"

Burke & Herbert Bank

Lobby Hours

Monday - Friday: 9:00 am - 5:00 pm

Saturday: 9:00 am - 1:00 pm

Drive Up Hours

Monday - Friday: 9:00 am - 5:00 pm

Saturday: 9:00 am - 1:00 pm

Scale: 1 1/2" = 1'-0"



ENTRANCE DOOR VINYL

P08  
QTY: 1



Existing E08



Proposed P08

**Specifications**  
**Materials** High Performance White Vinyl, Blue, Gold  
**Process** Graphics Plotted  
**Mounting** First Surface

Text	Strip	Ampersand
		
White	Ink Blue 8800-183	Gold Metallic 8800-91

1'-8"

Burke & Herbert Bank

Lobby Hours

Monday - Friday: 9:00 am - 5:00 pm

Saturday: 9:00 am - 1:00 pm

Drive Up Hours

Monday - Friday: 9:00 am - 5:00 pm


Saturday: 9:00 am - 1:00 pm

Scale: 1 1/2" = 1'-0"



**DRIVE UP VINYL**

P09  
QTY: 1

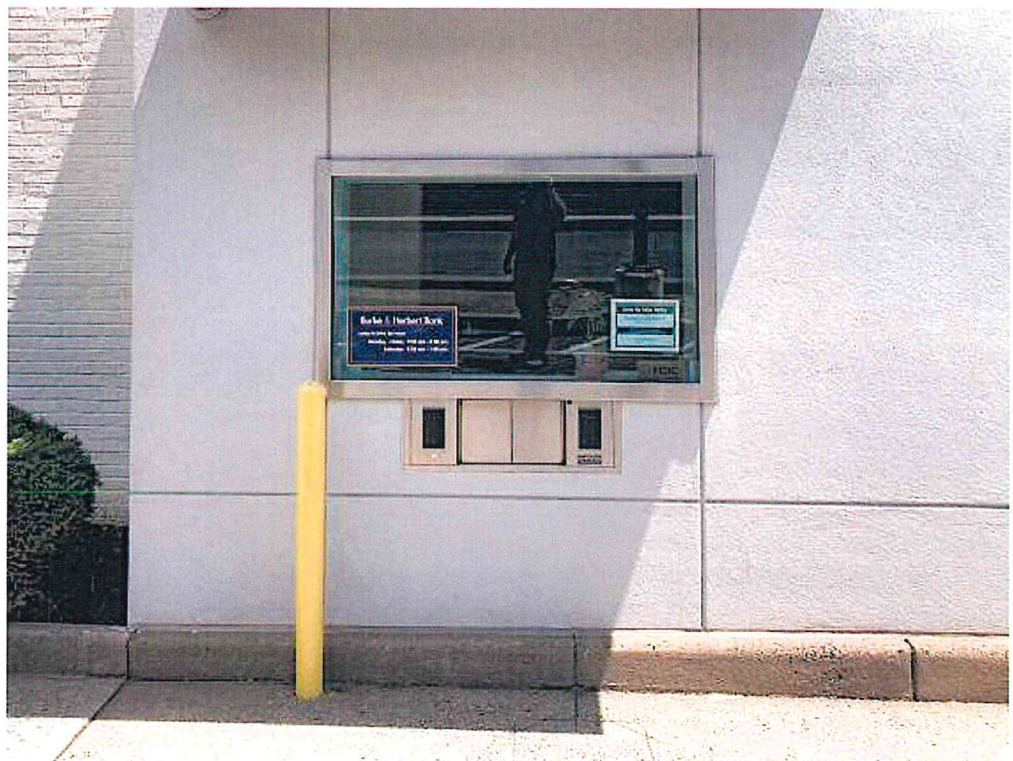

Existing

E09






Proposed

P09

Specifications

Materials High Performance White Vinyl, Blue, Gold  
Process Graphics Plotted  
Mounting First Surface

Text	Strip	Ampersand
		
White	Ink Blue 8800-183	Gold Metallic 8800-91

1'-8"

Burke & Herbert Bank

1'-3"

Lobby Hours

Monday - Friday: 9:00 am - 5:00 pm

Saturday: 9:00 am - 1:00 pm

Drive Up Hours

Monday - Friday: 9:00 am - 5:00 pm

Saturday: 9:00 am - 1:00 pm

Scale: 1 1/2" = 1'-0"



ATM SURROUND

P10  
QTY: 1



Existing E10



Proposed P10



LED Temperature 3000 K  
Lumens 150

Virtus Blue  
Pantone 534C

Gold Metallic  
8800-91

CURRENT SITE  
LAYOUT WITH OLD  
ATM

ASSUMED GROUND PLANE

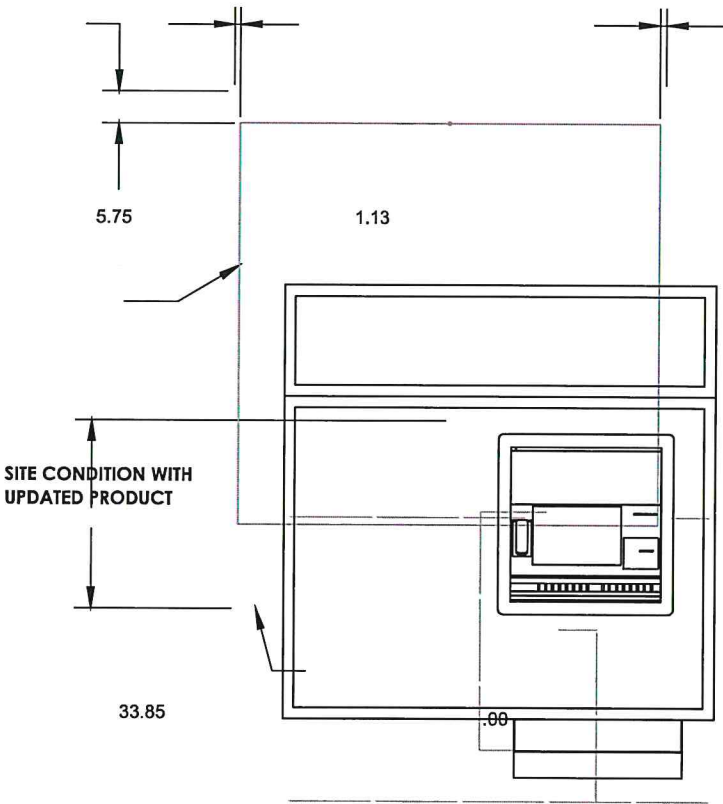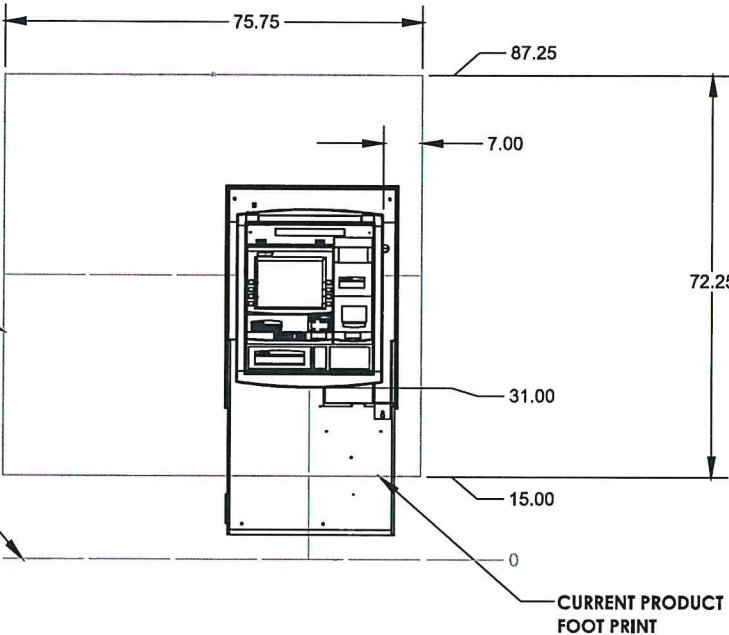

SITE CONDITION WITH  
UPDATED PRODUCT

ASSUMED GROUND PLANE

VIENNA

Site: Vienna  
Proposed unit: 5145.123  
ATM position: The ATM replacement will be mounted in the same position as the current atm.  
Survey: The current signage and atm on site have curved edges. It is assumed that all measurements are taken at the outermost point of the curves.  
Next step: It appears the survey may be giving inaccurate information about the horizontal position of the atm. This does not change the product, but it can affect the unit's artwork. Move forward with this concern in mind. The surround will need to be modified during installation.

UNIT TYPE: SURROUND	
UNIT #:	5145.123
ATM:	NCR-6684-IAT-WU-LS-5H-WO
POWER REQUIREMENTS	120V/20A/2400W MAX (IF APPLICABLE)
SHIPPING	STANDARD LTL
OTHER	
1. THIS DOCUMENT IS FOR REFERENCE ONLY AND SHOULD ONLY BE USED TO APPROVE PRODUCT SIZE AND SPECIFICATIONS.	
2. ATM HEIGHT SHOWN IS BASED ON THE HIGHEST OPERATING POINT (HOP) RECOMMENDED BY THE ATM MANUFACTURER IN RELATION TO THE WALK/DRIVE SURFACE. THE PRODUCT SHOWN IS PLACED IN THE RECOMMENDED LOCATION ACCORDING TO INTERNAL SPECIFICATIONS, UNLESS OTHERWISE SPECIFIED, AND DOES NOT TAKE INTO ACCOUNT SPECIFIC SITE CONDITIONS. STERLING ATM IS NOT RESPONSIBLE FOR ANY DISCREPANCIES BETWEEN THIS DOCUMENT AND THE ACTUAL ATM LOCATION, OR ANY FITMENT ISSUES THAT ARISE DUE TO SITE CONDITIONS.	
CUSTOMER SIGNATURE	DATE
PID#: XXXX-XXXX-XXXX	REVISION #: 3
DRAWN BY : SkylerD	DATE: 5/12/2025





ATM SURROUND

P10  
QTY: 1

LED Temperature 3000 K  
Lumens 150

SURROUND NOTES:  
  
ATM AND/OR NIGHT DROP MUST MOVE FORWARD 6" FROM WALL  
  
STERLING ATM IS NOT RESPONSIBLE FOR SURROUND PLACEMENT ISSUES DUE TO UNKNOWN SITE CONDITIONS, OBSTRUCTIONS OR ATM PLACEMENT. ATM PLACEMENT SHOWN IN THE SURROUND IS APPROXIMATE AND SHOULD NOT BE TAKEN AS AN EXACT POSITION.

VIENNA

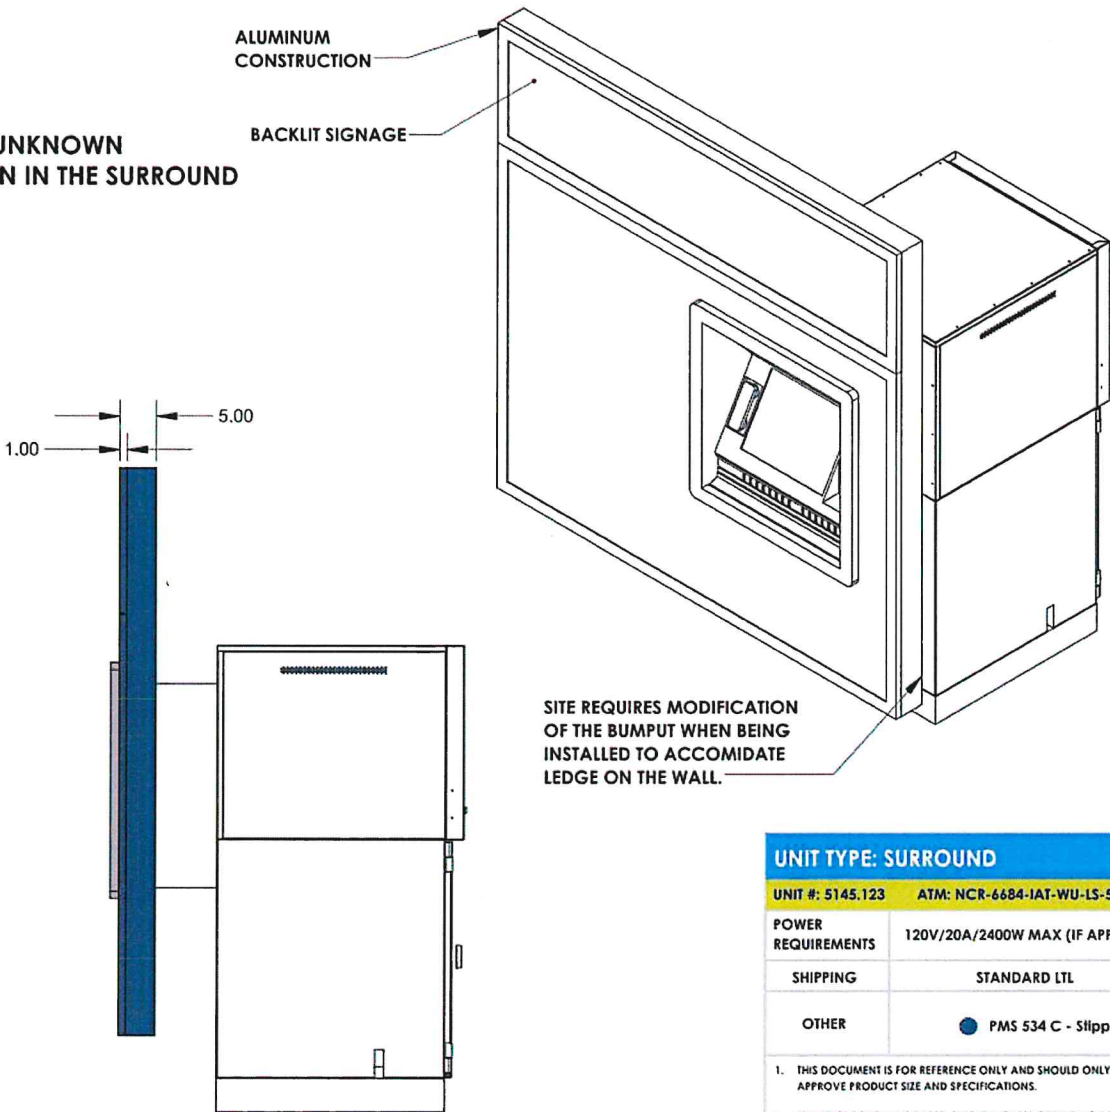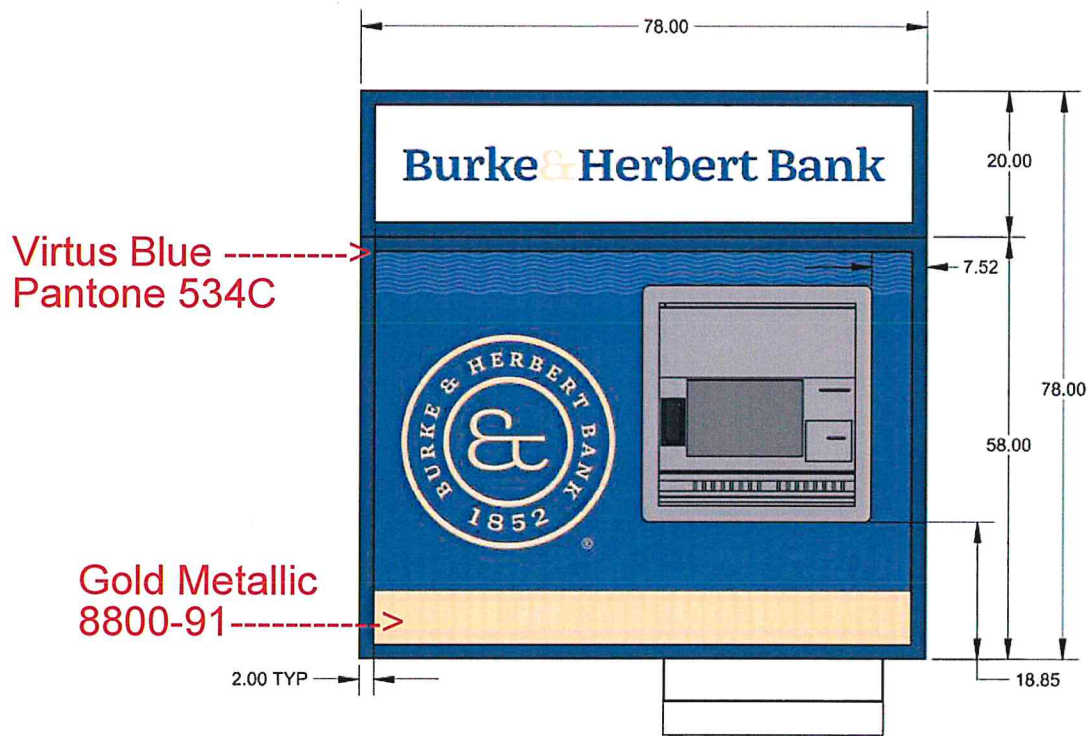

UNIT TYPE: SURROUND	
UNIT #: 5145.123	ATM: NCR-6684-IAT-WU-LS-5H-WO
POWER REQUIREMENTS	120V/20A/2400W MAX (IF APPLICABLE)
SHIPPING	STANDARD LTL
OTHER	<input checked="" type="radio"/> PMS 534 C - Stipple Finish
1. THIS DOCUMENT IS FOR REFERENCE ONLY AND SHOULD ONLY BE USED TO APPROVE PRODUCT SIZE AND SPECIFICATIONS.	
2. ATM HEIGHT SHOWN IS BASED ON THE HIGHEST OPERATING POINT (HOP) RECOMMENDED BY THE ATM MANUFACTURER IN RELATION TO THE WALK/DRIVE SURFACE. THE PRODUCT SHOWN IS PLACED IN THE RECOMMENDED LOCATION ACCORDING TO INTERNAL SPECIFICATIONS, UNLESS OTHERWISE SPECIFIED, AND DOES NOT TAKE INTO ACCOUNT SPECIFIC SITE CONDITIONS. STERLING ATM IS NOT RESPONSIBLE FOR ANY DISCREPANCIES BETWEEN THIS DOCUMENT AND THE ACTUAL ATM LOCATION, OR ANY FITMENT ISSUES THAT ARISE DUE TO SITE CONDITIONS.	
CUSTOMER SIGNATURE	DATE
PID#: XXXX-XXXX-XXXX	
DRAWN BY: Skyler D COLOR BY: Casey A	
REVISION #: 1	
DATE: 05/12/2025	