

VIRGINIA TIRE & AUTO

PROPOSED RENDERINGS | VIENNA, VA | 3-16-18



VIRGINIA TIRE & AUTO

PROPOSED RENDERINGS | VIENNA, VA | 3-16-18



PROPOSED:



EXISTING:

VIRGINIA TIRE & AUTO

NEIGHBORHOOD STUDY | VIENNA, VA | 3-16-18


IMAGES COURTESY OF GOOGLE, LLC



VIRGINIA TIRE & AUTO


PROPOSED ELEVATIONS/MATERIALS | VIENNA, VA | 3-16-18

BR-1



EXISTING BRICK
PTD. WITH
SILICOTE PAINT,
COLOR: WHITE

MET-1




ALUMINUM; COLOR:
VIRGINIA TIRE &
AUTO GREEN

MET-2




ALUMINUM;
COLOR: BLACK.

BR-2



BRICK FORM EIFS,
PTD. WHITE TO MATCH
ADJACENT BRICK

MET-3





2" SQUARE STEEL
TUBE POWDER COATED,
COLOR: BLACK

L-1



LEOTEK ES-2 LIGHT,
REF: SHEET 5

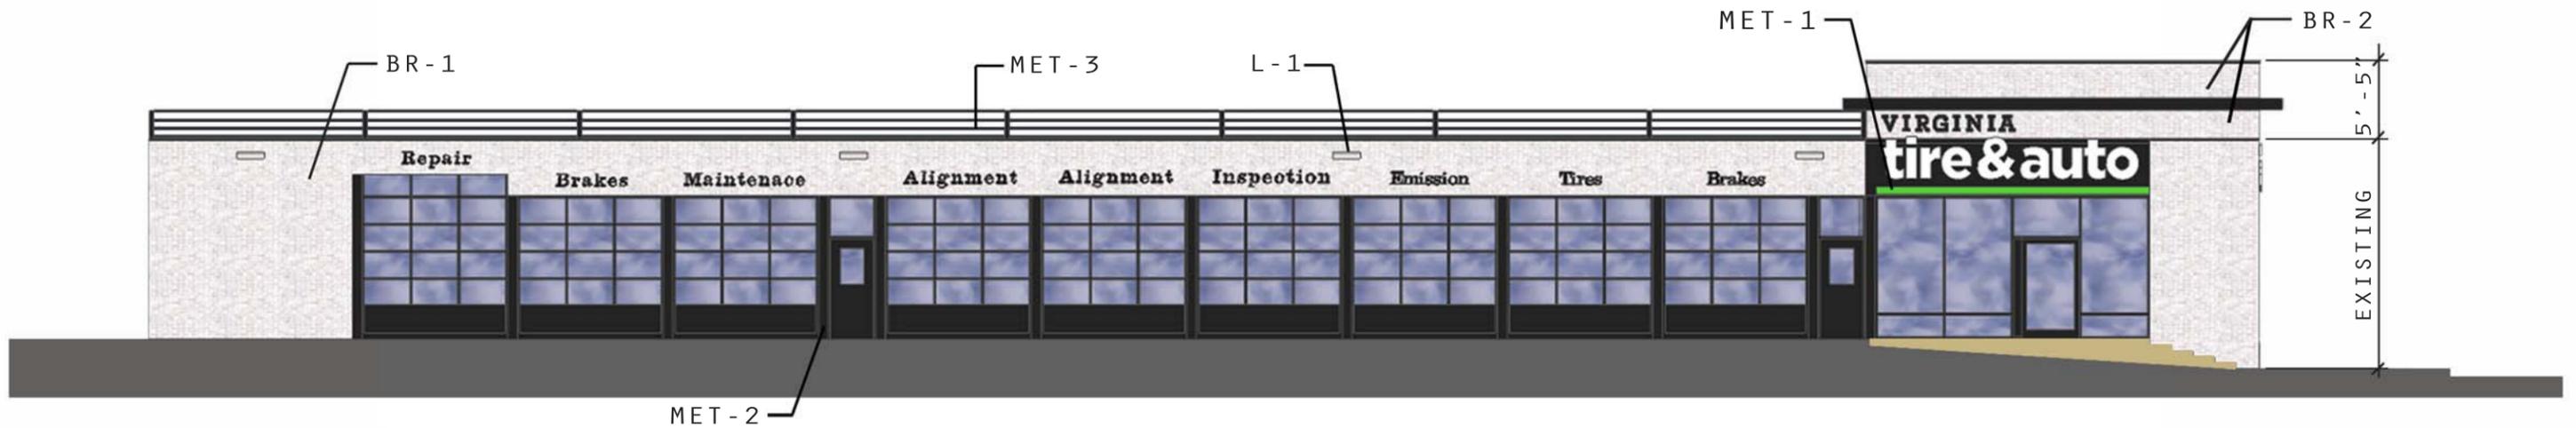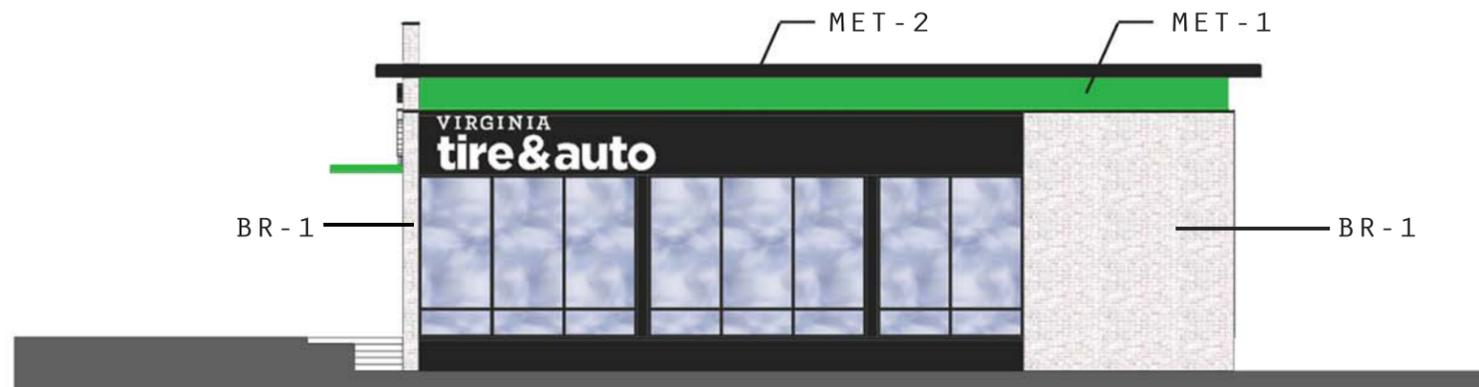

VIRGINIA TIRE & AUTO

EXTERIOR LIGHT SPEC | VIENNA, VA | 3-16-18




Eseta™ LED Wall Sconce ES2

Luminaire Data

Weight 15 lbs [6.8 kg]
20.1 lbs [9.1kg] with EM option



Project _____
Type _____
Catalog No. _____

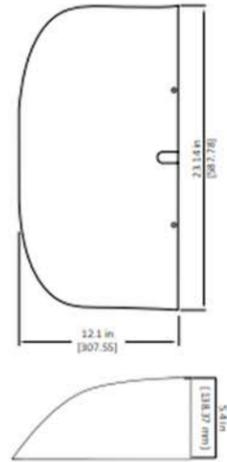

Ordering Information

Sample Catalog No. ES2-88H-MV-NW-W-BK-450-EM

Product	No. & Type of LEDs	Voltage	Color Temperature ¹	Distribution	Finish ²	Drive Current ³	Options
ES2	88H 130H	MV 120-277V HV 347-480V	WW 3000K	W Wide	BK Black	450 450mA	PC Button Type Photo Control
			NW 4000K		DB Dark Bronze		PCR7-CR ANSI 7-Wire Photocontrol Receptacle
			CW 5000K	FT Forward Throw	GY Gray		MSL3 ³ Motion Sensor, L3 Lens
					WH White		MSL7 ³ Motion Sensor, L7 Lens
							EM ⁴ Emergency Battery System
							FSIR100 Motion Sensor Configuration Tool

Notes:
1 Consult factory for other color temperatures.
2 Consult factory for non-standard finish options.
3 Motion sensor default setting dims luminaire to 50% when no motion is detected for 5 minutes. Field adjustable settings available using FSIR100 option.
4 Emergency Battery System available with MV only.



© 2017 Leotek Electronics USA
ES-2 Spec Sheet_092517. Specifications subject to change without notice.



Eseta™ LED Wall Sconce ES2

Luminaire Specifications

Housing

Die cast aluminum housing with back mounting plate and outdoor rated cable. Back mounting plate includes novel hanging features to allow one-person installation. Knockouts on the top and bottom of the housing allow conduit entry. Electrical components are accessed behind gasketed cover.

Light Emitting Diodes

Hi-flux/hi-power white LEDs are tested in accordance with IES LM-80 testing procedures. Warm White (3000K), Neutral White (4000K) and Cool White (5000K) with minimum 70 CRI are standard. LEDs are 100% mercury and lead free.

Optical Systems

The OMNILENS™ system creates a low brightness source to reduce glare with precise Wide or Forward Throw distributions. Lens cover is UV stabilized, vandal-resistant polycarbonate. Luminaire produces 0% total lumens above 90° (BUG Rating, U=0).

Electrical

Power supply features a minimum power factor of .90 and <20% Total Harmonic Distortion (THD). EMC meets or exceeds FCC CFR Part 15. Transient voltage complies with ANSI C62.41 Cat. A. Integral surge protector is tested per ANSI/IEEE C62.41.2 definitions for standard and optional waveforms for Location Category C High.

Finish

Housing receives a fade and abrasion resistant epoxy polyester powder coat. Finish tested to withstand 5000 hours in salt spray exposure per ASTM B117. Finish tested 5000 hours in UV exposure per ASTM G154 and meets ASTM D523 gloss retention.

Listings/Ratings/Labels

Luminaires are UL listed for use in wet locations and emergency lighting in the United States and Canada. Ambient operating temperature is -40°C to 40°C with no accessories installed. Entire fixture maintains an IP66 and IK10 rating. Assembled in the United States.

Performance Data

All data nominal, consult factory for IES files or LM-79 reports.


CCT	Two Distributions		Wide Distribution			Forward Throw Distribution		
	No. of LEDs & Type	Drive Current (mA)	System Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	System Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
3000K	88H	450	128.8	13285	103.1	129.7	13491	104.0
	130H		185.8	18973	102.1	182.4	18690	102.5
4000K	88H	450	130.1	14032	107.9	125.6	14254	113.5
	130H		185.3	19562	105.6	183.9	19625	106.7
5000K	88H	450	129.0	13981	108.4	127.8	13943	109.1
	130H		184.2	19542	106.1	181.7	19150	105.4

© 2017 Leotek Electronics USA
ES-2 Spec Sheet_092517. Specifications subject to change without notice.



Eseta™ LED Wall Sconce ES2

Motion Sensor (Optional) Data

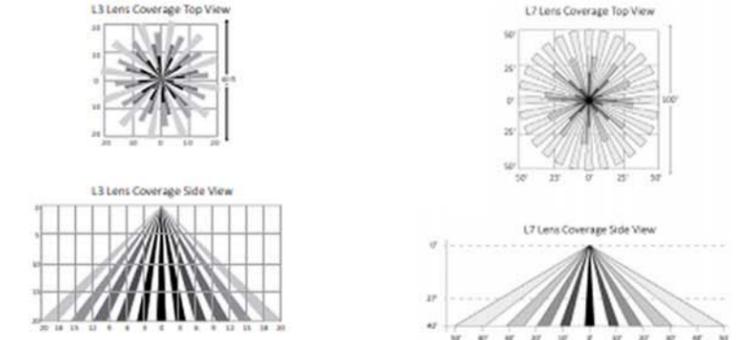

Motion Sensor (Optional) Specifications

Description

Digital passive infrared luminaire integrated outdoor occupancy sensor provides high/low/off control based on motion. Initial setup and subsequent sensor adjustments are made using a handheld configuration tool.

Operation

Standard factory setting will dim the luminaire to 50% until motion is sensed and then it will power to 100%. When motion is not detected for five minutes, the luminaire will dim back to 50%. Ramp up and fade down times are adjustable, but initially set to NONE.

Emergency Battery System (Optional) Specifications

Description

Emergency battery system option provides a nominal 2300 lumens for a minimum of 90 minutes and can be specified with motion sensor option. Test switch and charging indicator light are visible and accessible on the optical cover.

Temperature Rating

Ambient operating temperature is -20C to +60C.

The percent dimming and time durations may be field adjusted as required using FSIR100 option. FSIR user guide available at: www.wattstopper.com.

Optical System

Multi-cell, multi-tier Fresnel lens with a 360 degree view detects unobstructed motion. L3 lens is designed for a mounting height up to 20 feet and detects motion within one mounting height. L7 lens is designed for a mounting height up to 40 feet and detects motion within 1.25 mounting height.

Listings/Ratings/Labels

Emergency LED driver and batteries are UL recognized and CSA certified. Emergency illumination time exceeds the National Electrical Code (NEC), Life Safety Code (NFPA-LSC), National Building Code of Canada (NBC), National Fire Code of Canada (NFC) and UL 90-minute requirements.

Finish
Sensor exterior ring and lens are white polycarbonate, UV and impact resistant.

Listings/Ratings
Sensor is TUV, UL and cUL listed, IP66 rated and CE compliant.

Warranty
5-year limited warranty on luminaires and components with a motion sensor.


Warranty
3-year limited warranty on Emergency Battery System.

© 2017 Leotek Electronics USA
ES-2 Spec Sheet_092517. Specifications subject to change without notice.




VIRGINIA TIRE & AUTO

MONUMENT SIGN | VIENNA, VA | 3-16-18

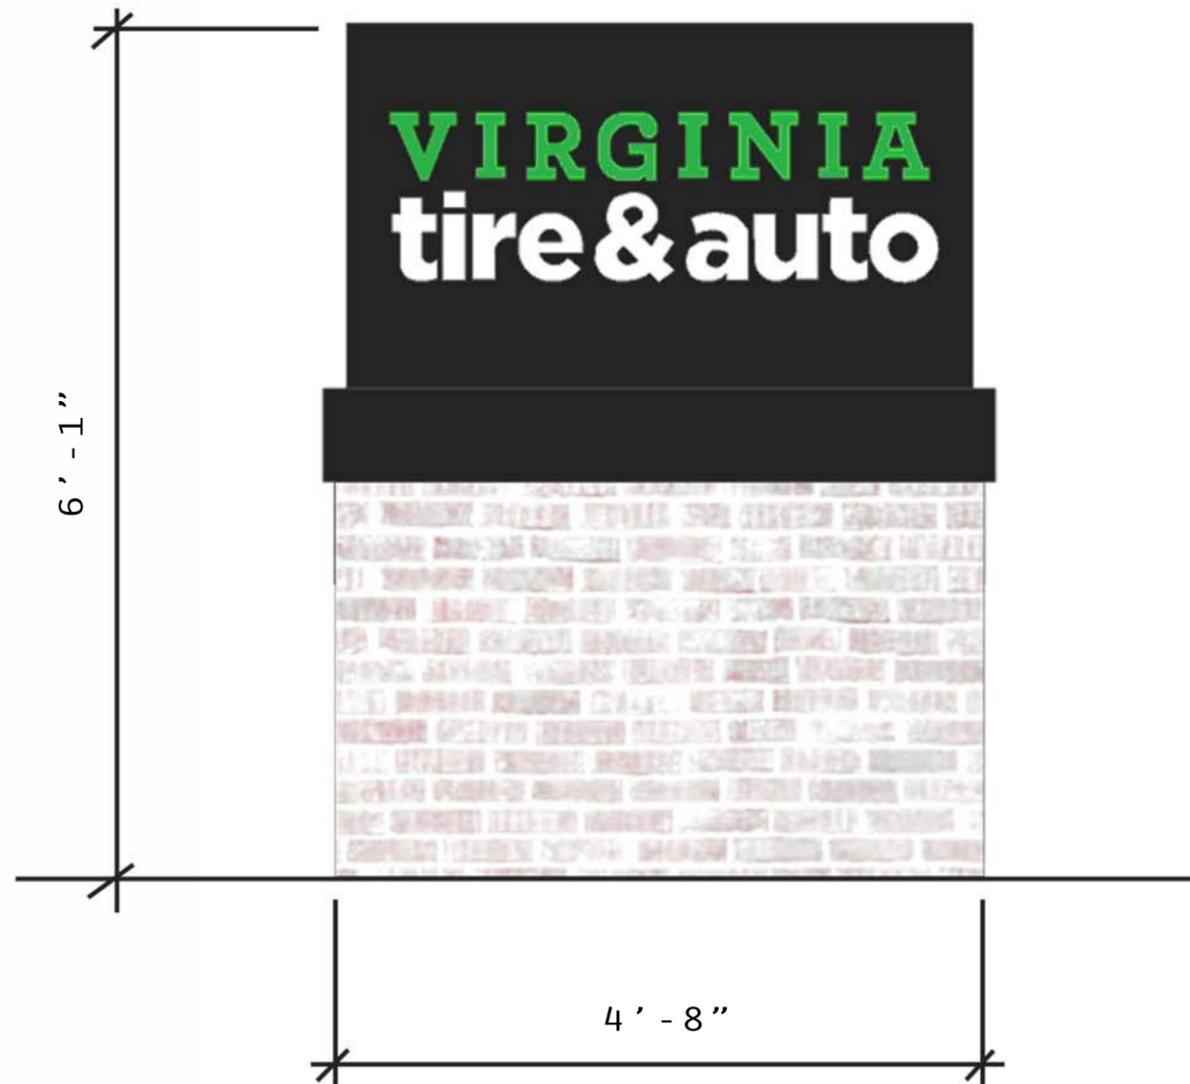

BRICK PTD. WITH SILICOTE
PAINT, COLOR: WHITE



ALUMINUM; COLOR: VIRGINIA
TIRE & AUTO GREEN.



ALUMINUM; COLOR: BLACK.

