


T-Mobile
 T-MOBILE NORTHEAST LLC
 12050 BALTIMORE AVENUE
 BELTSVILLE, MD 20705
 OFFICE: (240) 264-8600
 FAX: (240) 264-8610

NB+C
 TOTALLY COMMITTED.
 NB+C ENGINEERING SERVICES, LLC.
 6095 MARSHALEE DRIVE, SUITE 300
 ELK RIDGE, MD 21075
 (410) 712-7092

7WAC050A
 WHITE OAK TOWER
 301 MAPLE AVENUE WEST
 VIENNA, VA 22180
 TOWN OF VIENNA

REVISIONS

REV	DATE	DESCRIPTION	BY
0	05/13/21	FINAL CDs	AMM

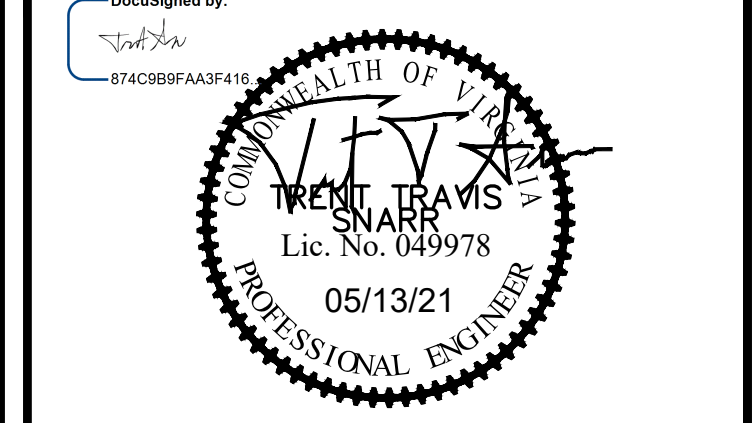

TRENT TRAVIS SNARR, P.E.
 VIRGINIA PROFESSIONAL ENGINEER
 LICENSE #049978

ANTENNA SCHEDULE

A-1

ANTENNA INFORMATION

SECTOR	STATUS	ANTENNA MANUFACTURER	ANTENNA MODEL	ANTENNA DIMENSIONS (HxWxD)	MECHANICAL DOWN TILT	ELECTRICAL DOWN TILT	RAD CENTER	AZIMUTH	TMA/RRU QUANTITY & MODEL	CABLE QUANTITY & TYPE	CABLE LENGTH
A1	EXISTING	ERICSSON	AIR32DB B66/B2A	56.6"x12.9"x8.7"	0°	2'/2'/2'/2'	74'	30°	-		
A2	EXISTING TO BE REMOVED	ANDREW	TMBXX-6516-A2M	59.0"x11.9"x6.3"	0°	2'	74'	30°	(2) EXISTING ERICSSON STYLE 1A - KRY 112 71 TMA (TO BE REMOVED) (1) EXISTING GENERIC TWIN STYLE 1B - AWS TMA (TO BE REMOVED)	(1) EXISTING 6x12 HYBRID CABLE (1) PROPOSED 6X12 HYBRID CABLE	145'±
A2	PROPOSED	ERICSSON	AIR6449 B41	33.10"x20.60"x8.30"	0°	2'/2'	74'	30°	-		
A3	EXISTING	RFS	APXVAALL24_43-U-NA20	95.9"x24.0"x8.5"	0°	6'/6'/2'/2'	74'	30°	(1) EXISTING RADIO 4449 B71+B85 (1) PROPOSED RADIO 4415 B25		
B1	EXISTING	ERICSSON	AIR32DB B66/B2A	56.6"x12.9"x8.7"	0°	2'/2'/2'/2'	79'	135°	-		
B2	EXISTING	RFS	APXVAALL24_43-U-NA20	95.9"x24.0"x8.5"	0°	6'/6'/2'/2'	79'	135°	(1) EXISTING RADIO 4449 B71+B85 (1) PROPOSED RADIO 4415 B25		
B3	EXISTING TO BE REMOVED	ANDREW	TMBXX-6516-A2M	59.0"x11.9"x6.3"	0°	2'	79'	135°	(2) EXISTING ERICSSON STYLE 1A - KRY 112 71 TMA (TO BE REMOVED) (1) EXISTING GENERIC TWIN STYLE 1B - AWS TMA (TO BE REMOVED)	(1) EXISTING 6X12 HYBRID CABLE (1) PROPOSED 6X12 HYBRID CABLE	140'±
B3	PROPOSED	ERICSSON	AIR6449 B41	33.10"x20.60"x8.30"	0°	2'/2'	79'	135°	-		
C1	EXISTING	ERICSSON	AIR32DB B66/B2A	56.6"x12.9"x8.7"	0°	2'/2'/2'/2'	74'	255°	-		
C2	EXISTING	RFS	APXVAALL24_43-U-NA20	95.9"x24.0"x8.5"	0°	6'/6'/2'/2'	74'	255°	(1) EXISTING RADIO 4449 B71+B85 (2) EXISTING GENERIC TWIN STYLE 1B - AWS TMA (TO BE REMOVED) (1) PROPOSED RADIO 4415 B25	(1) EXISTING 6X12 HYBRID CABLE (1) PROPOSED 6X12 HYBRID CABLE	180'±
C3	PROPOSED	ERICSSON	AIR6449 B41	33.10"x20.60"x8.30"	0°	2'/2'	74'	255°	-		
D1	PROPOSED	ERICSSON	AIR6449 B41	33.10"x20.60"x8.30"	0°	2'/2'	74'	330°	-		
D2	EXISTING	RFS	APXVAALL24_43-U-NA20	95.9"x24.0"x8.5"	0°	6'/6'/2'/2'	74'	330°	(1) EXISTING RADIO 4449 B71+B85 (2) EXISTING GENERIC TWIN STYLE 1B - AWS TMA (TO BE REMOVED) (1) PROPOSED RADIO 4415 B25	(1) EXISTING 6X12 HYBRID CABLE (1) PROPOSED 6X12 HYBRID CABLE	180'±
D3	EXISTING	ERICSSON	AIR32DB B66/B2A	56.6"x12.9"x8.7"	0°	2'/2'/2'/2'	74'	330°	-		

NOTES:
 1. CONTRACTOR TO VERIFY PROPOSED ANTENNA INFORMATION IS THE MOST CURRENT DATA AT TIME OF CONSTRUCTION.
 2. CONTRACTOR TO CONFIRM CABLE LENGTHS PRIOR TO CONSTRUCTION.

NOTE:
 ALL EXISTING COAX CABLES AND
 TMAS ARE TO BE REMOVED

1 ANTENNA CONFIGURATION SCHEDULE
 A-1 NOT TO SCALE