

PARS ELECT SIGN & DESIGN 6347 B ROLLING RD SPRINGFIELD VA 22152 (202)412-6580





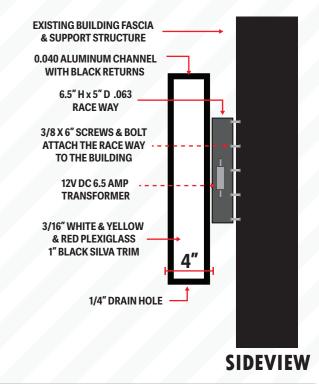

Location of the 1/4 x 3" screw & anchorsThe letters structure designed to withstand 105 MPH winds



METHOD OF INSTALLATION

Using 3/8 x 6" screw & anchors between raceway & building . 1/4x3" between raceway and channel letters sealed by U.L silicone.

DESCRIPTION OF WORK

Manufacture and install two (2) set of plastic faced, internally lighted channel letters as shown our drawing.

Installed directly on building, with a race way, the race way is 6.5"H 5" d, .080 thickness aluminum. 4" deep black and red returns .040 aluminum. 3/16" rohm hess & yellow plex. fully SAMSUNG l.e.d lights. 1" black & red jewlite trim. each letter should have 2 drain. 12 volt dc 6.5 amp transformer which will all hardware be approved and labeled to meet all local codes by county and 2015 Virginia Construction code . all attaching hardware will be galvanized.