

Type 2
Double Sided, Internally illuminated Post and Cabinet
Direct Bury / Concrete pad
Minimum 36" Embedment
QTY: 1

takeform

11601 Maple Ridge Rd, Medina, NY, 14103
P 800.528.1398 F 585.798.8889
www.takeform.net

Signify

EXTERIOR SIGNAGE

Project:
Navy Federal Credit Union
Exterior

Date: 12.28.17
Drawn By: PD

Filename:
NAV0044_157400_EXT_Rev2

Revisions:
01.22.18 PD
03.07.18 PD

Scale:
1/2" = 1'-0"

Design Review By:


Notes:

Site Survey Required
Refer to Customer Approved
message schedule for final copy.
Illumination requires 120V
electrical service (by others).

Product Approval

NO CHANGES	
Approved By:	Date:
WITH CHANGES AS NOTED	
Approved By:	Date:

Product will be manufactured as indicated
on this document. Please review carefully.

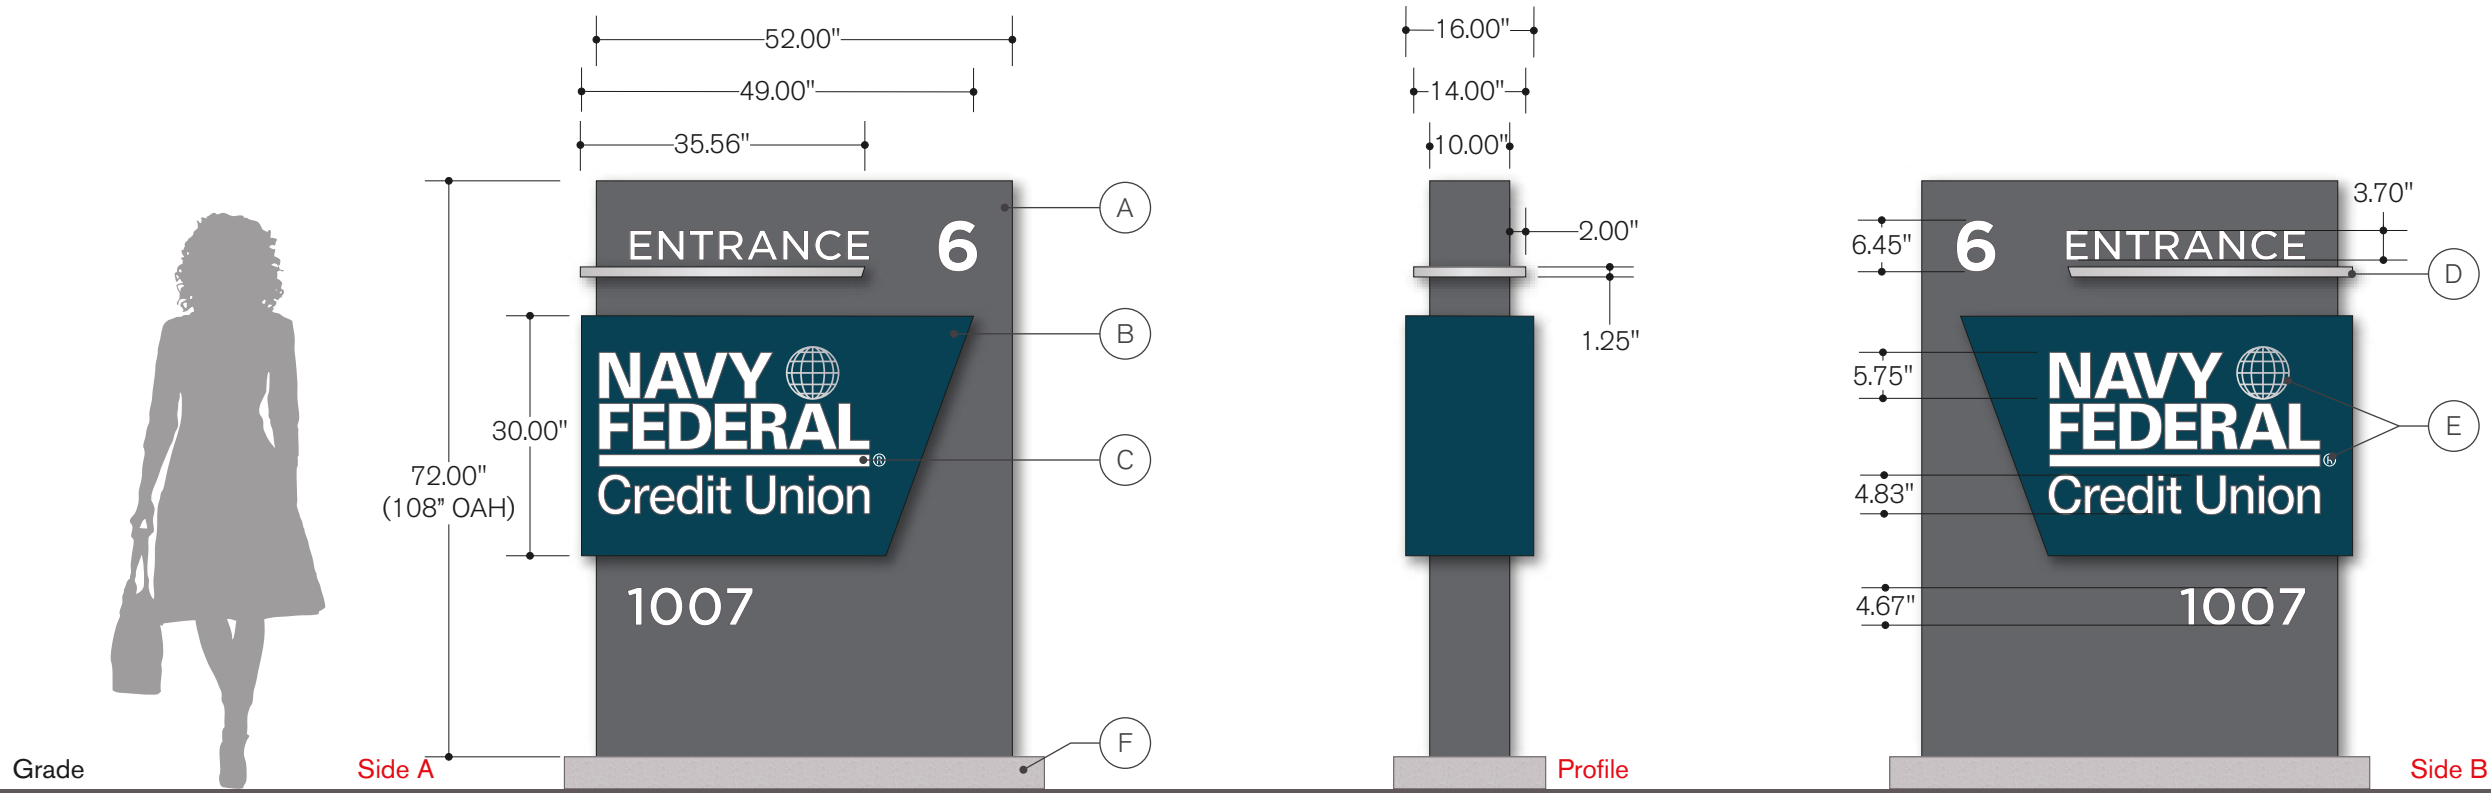

Cabinet

A Routed, Painted Fabricated .125 Aluminum
To Match **Cool Gray 10**

Accent Cabinet

B Painted, Fabricated .125 Aluminum
Color Match Required

Illuminated Copy

C 3/16" Acrylic White Translucent Backer
Font: Gotham Medium

Accent Bar

D Painted, Fabricated .125 Aluminum
CO601 Satin Silver

Non Illuminated Graphics

E First Surface Applied Vinyl
220-120 Silver / **220-10** White

Base

F Poured Concrete

Double Sided, Internally illuminated Post and Cabinet
Direct Bury / Concrete pad
Minimum 36" Embedment

QTY: 2

Type 4

Double Sided, Non illuminated Post and Cabinet
Direct Bury / Concrete pad
Minimum 36" Embedment

QTY: 1



11601 Maple Ridge Rd, Medina, NY, 14103

P 800.528.1398 **F** 585.798.8889

www.takeform.net

Signify

EXTERIOR SIGNAGE

Project:

Navy Federal Credit Union

Exterior

Date:

12.28.17

Drawn By:

PD

Filename:

NAV0044_157400_EXT_Rev2

Revisions:

01.22.18

PD

03.07.18

PD

Scale:

$$1'' = 1' - 0''$$

Design Review By:

Notes:

Site Survey Required

Refer to Customer Approved
message schedule for final copy.

Product Approval

NO CHANGES

Approved By: _____

Date: _____

WITH CHANGES AS NOTED

Approved By: _____




Date: _____

Product will be manufactured as indicated on this document, Please review carefully.

Rendering 2 of 4

Type 5
Double Sided, Non Illuminated Post and Cabinet
Direct Bury / Concrete pad
Minimum 36" Embedment
QTY: 5

Type 6
Double Sided, Non Illuminated Post and Panel
Direct Bury / Sonotube
Minimum 36" Embedment
QTY: 2

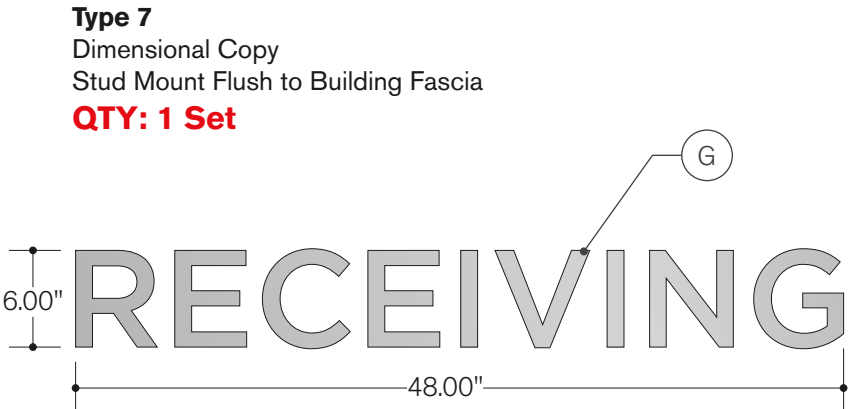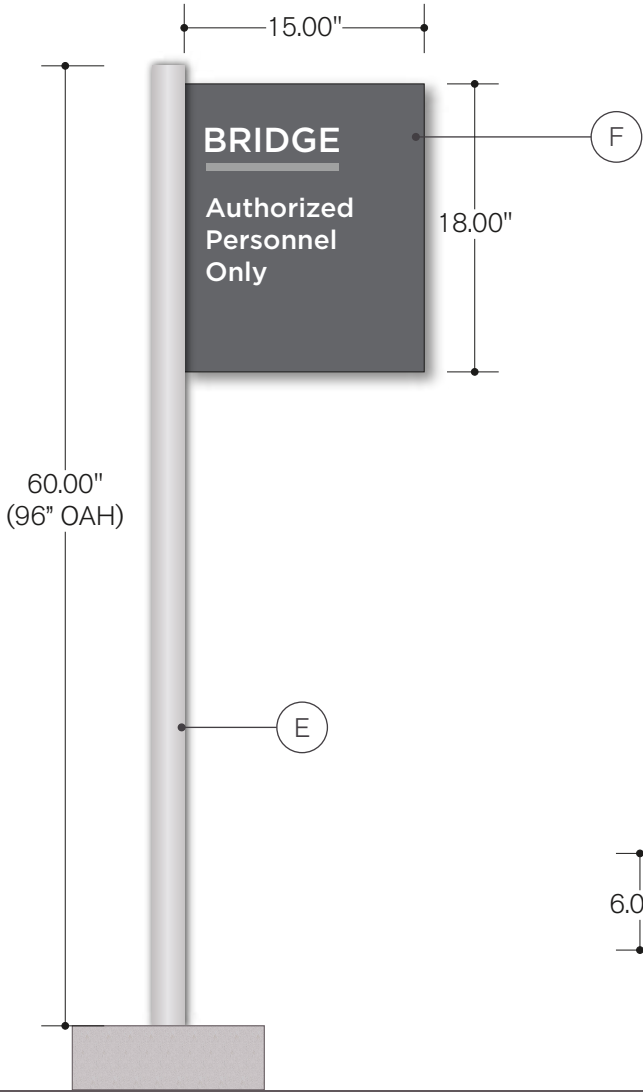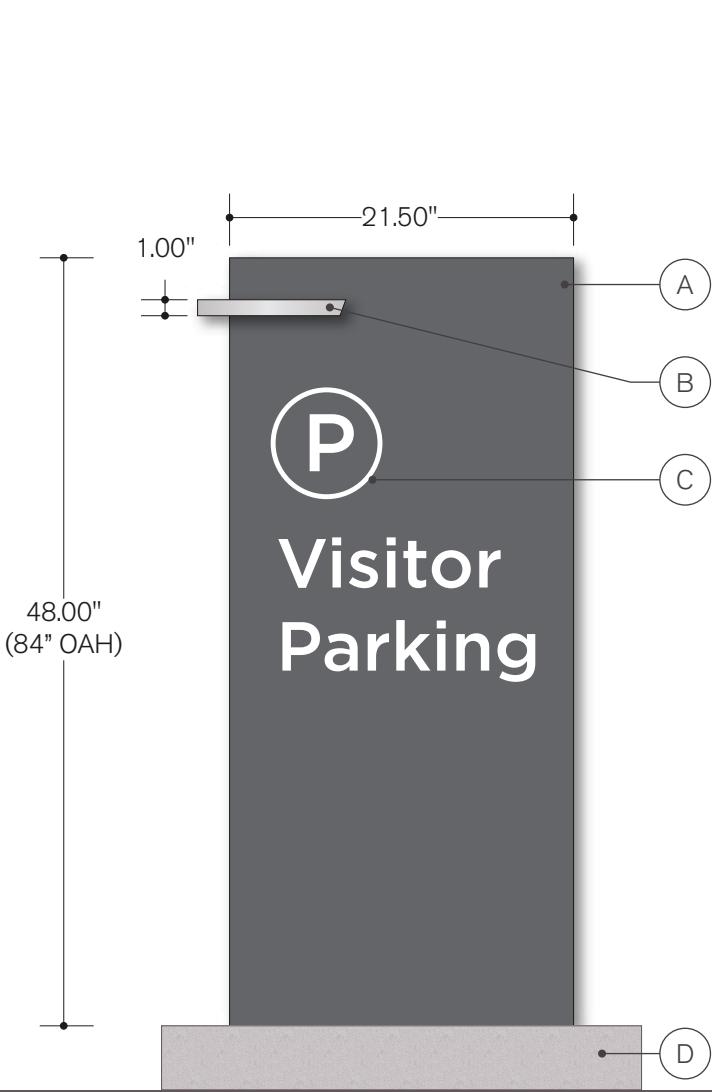

Cabinet

  6" Deep, Painted Fabricated .125 Aluminum To Match **Cool Gray 10**

Accent Bar

  Painted, Fabricated .125 Aluminum **CO601** Satin Silver

Copy / Graphics

   First Surface Applied Vinyl **220-10** White / **220-31** Medium Gray



Base

  Poured Concrete

Post

  Painted, 2" Aluminum Round Tube **CO601** Satin Silver

Panel

  Painted .125 Aluminum To Match **Cool Gray 10**

Dimensional Copy

  Flat Cut .25" Aluminum Brushed / Clear Anodized

takeform

11601 Maple Ridge Rd, Medina, NY, 14103
P 800.528.1398 F 585.798.8889
www.takeform.net

Signify
EXTERIOR SIGNAGE

Project:
Navy Federal Credit Union
Exterior

Date: 12.28.17 Drawn By: PD

Filename:
NAV0044_157400_EXT_Rev2

Revisions:

01.22.18	PD
03.07.18	PD

Scale:
1" = 1'-0"

Design Review By:

Notes:


Site Survey Required

Refer to Customer Approved message schedule for final copy.


Product Approval

NO CHANGES
Approved By: _____
Date: _____
WITH CHANGES AS NOTED
Approved By: _____
Date: _____

Product will be manufactured as indicated on this document. Please review carefully.

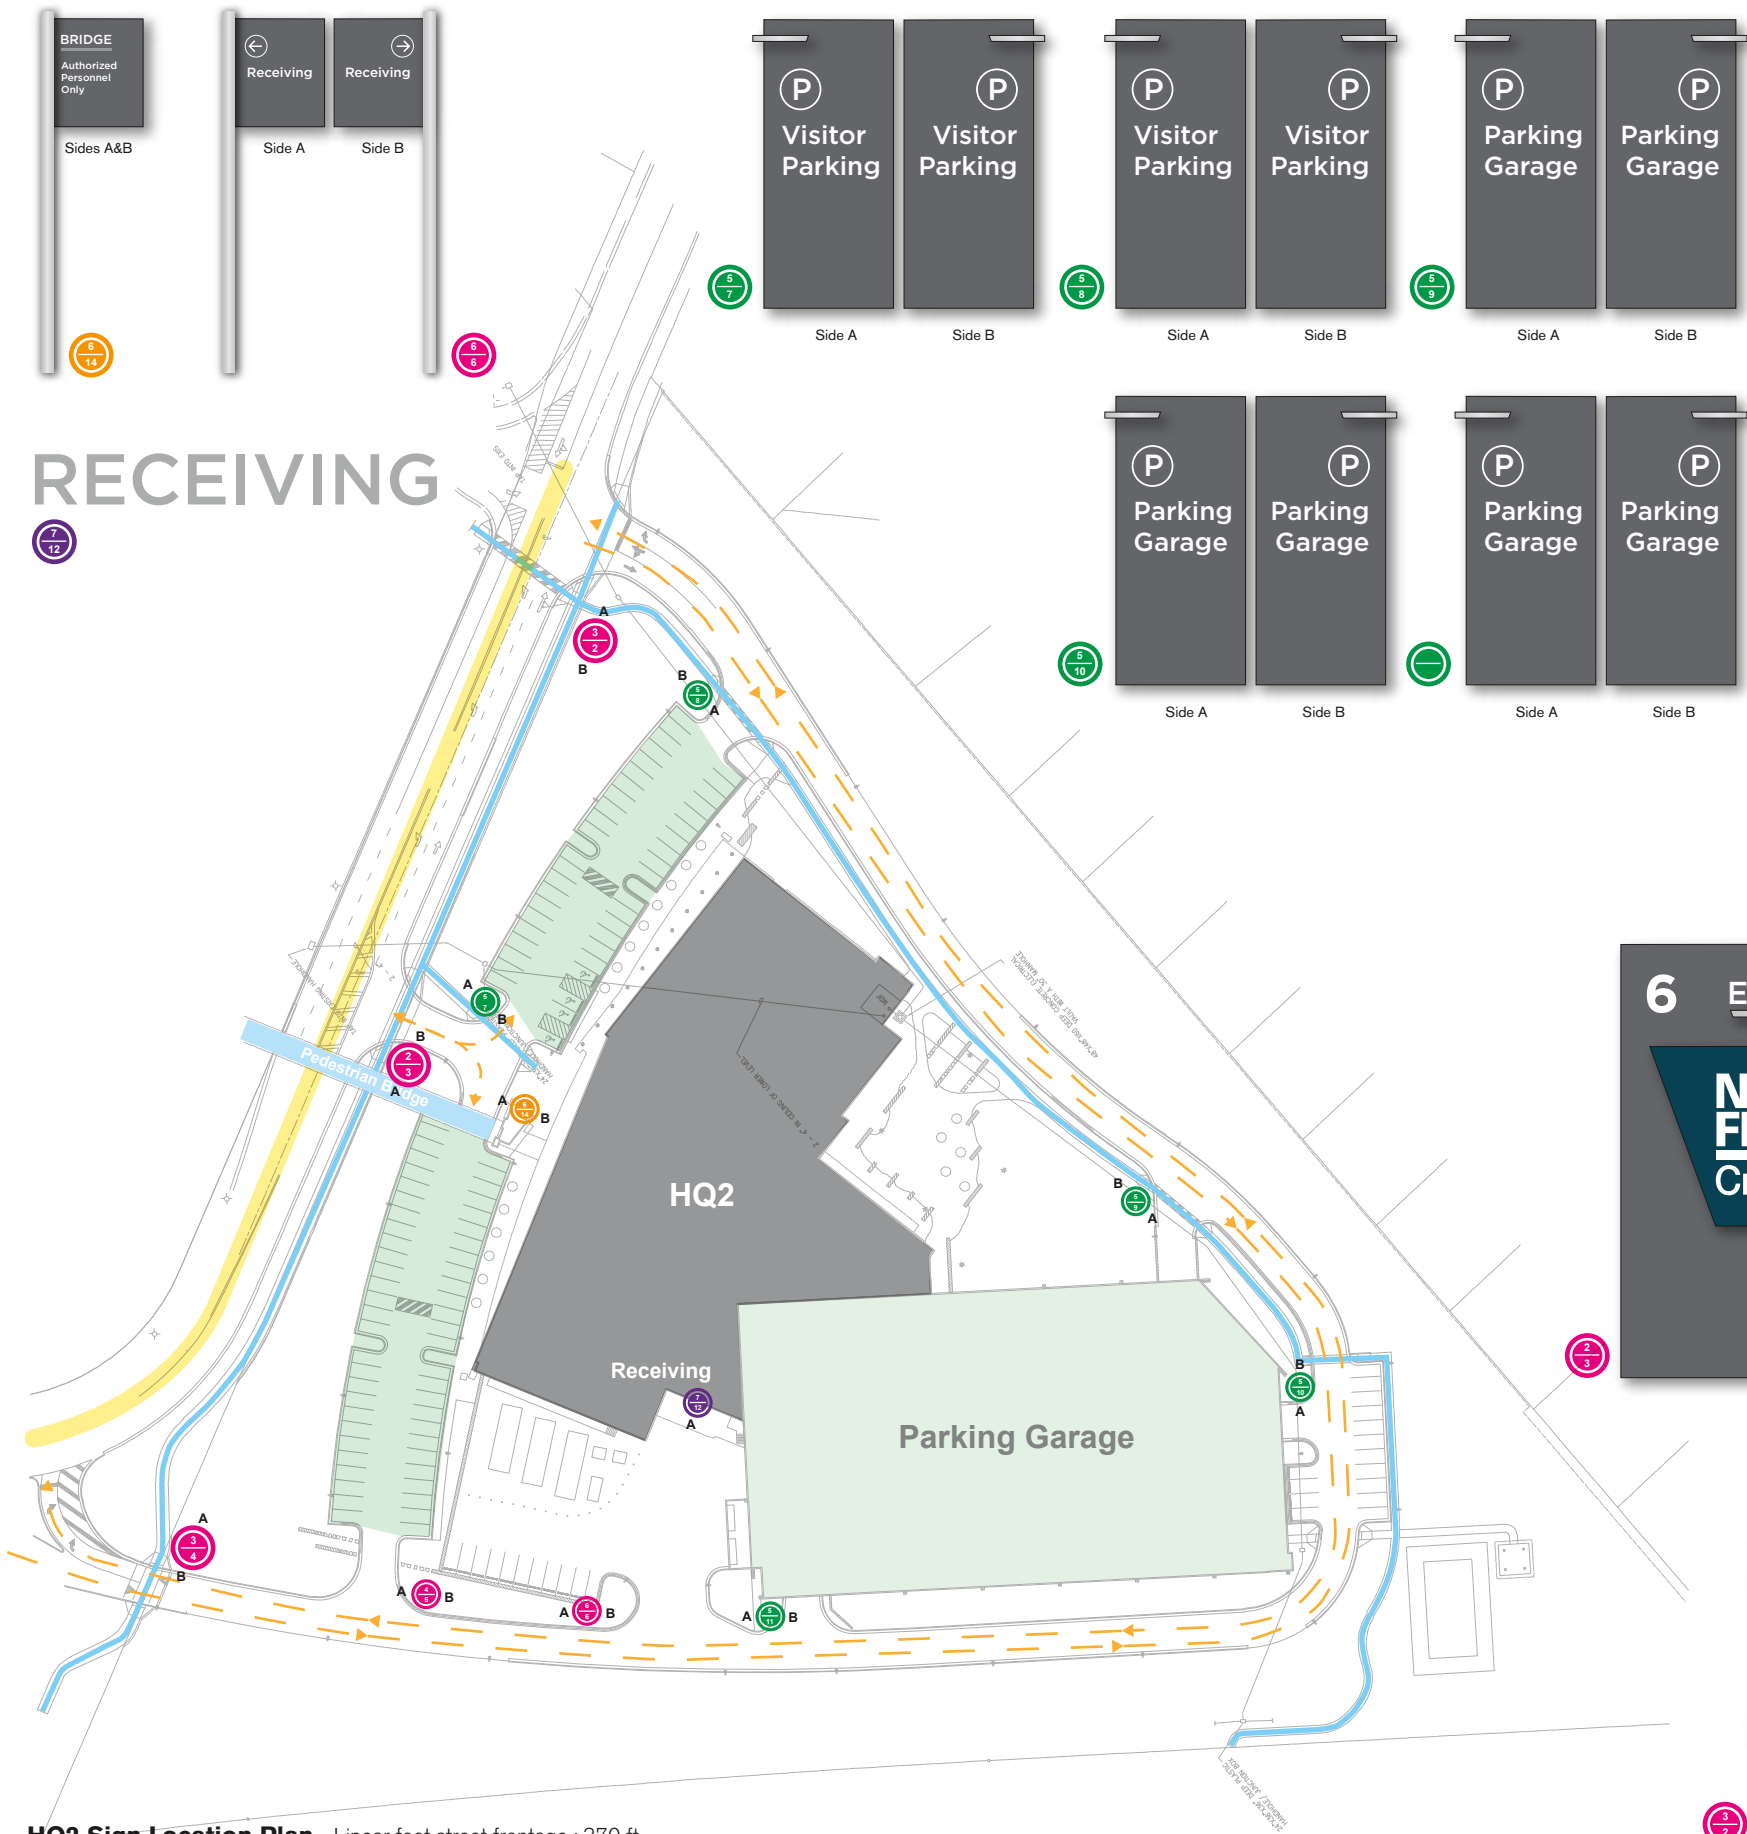

HQ2 Sign Location Plan Linear foot street frontage : 370 ft.

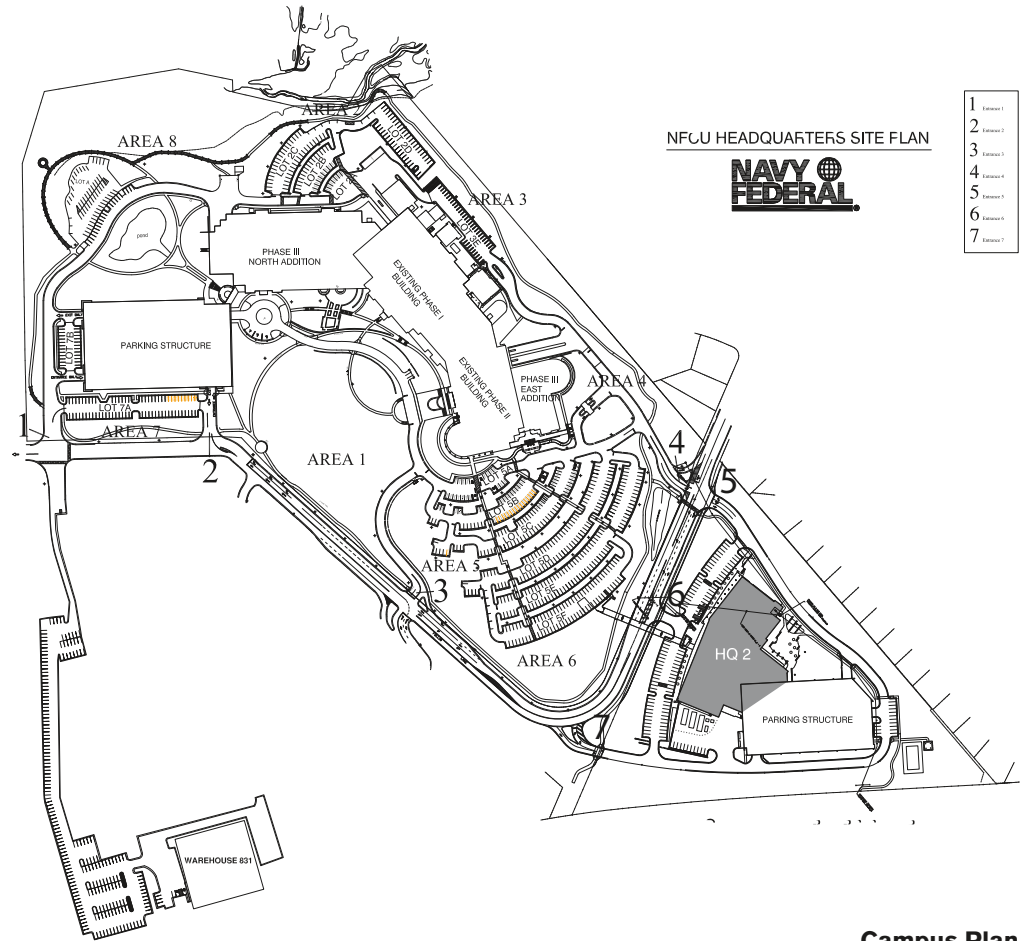

Campus Plan



