




Panoramic 3D Gen. II

Everylite Datasheet Ver 1.0.0

- Integrated lens technology with upgraded 165 degree beam angle
- IP67 waterproof design
- Perfect color consistency with in-house color binning
- 2835 surface mount LED, high luminous efficacy
- 50,000 hours expected lifetime
- UL , CE and RoHS approvals

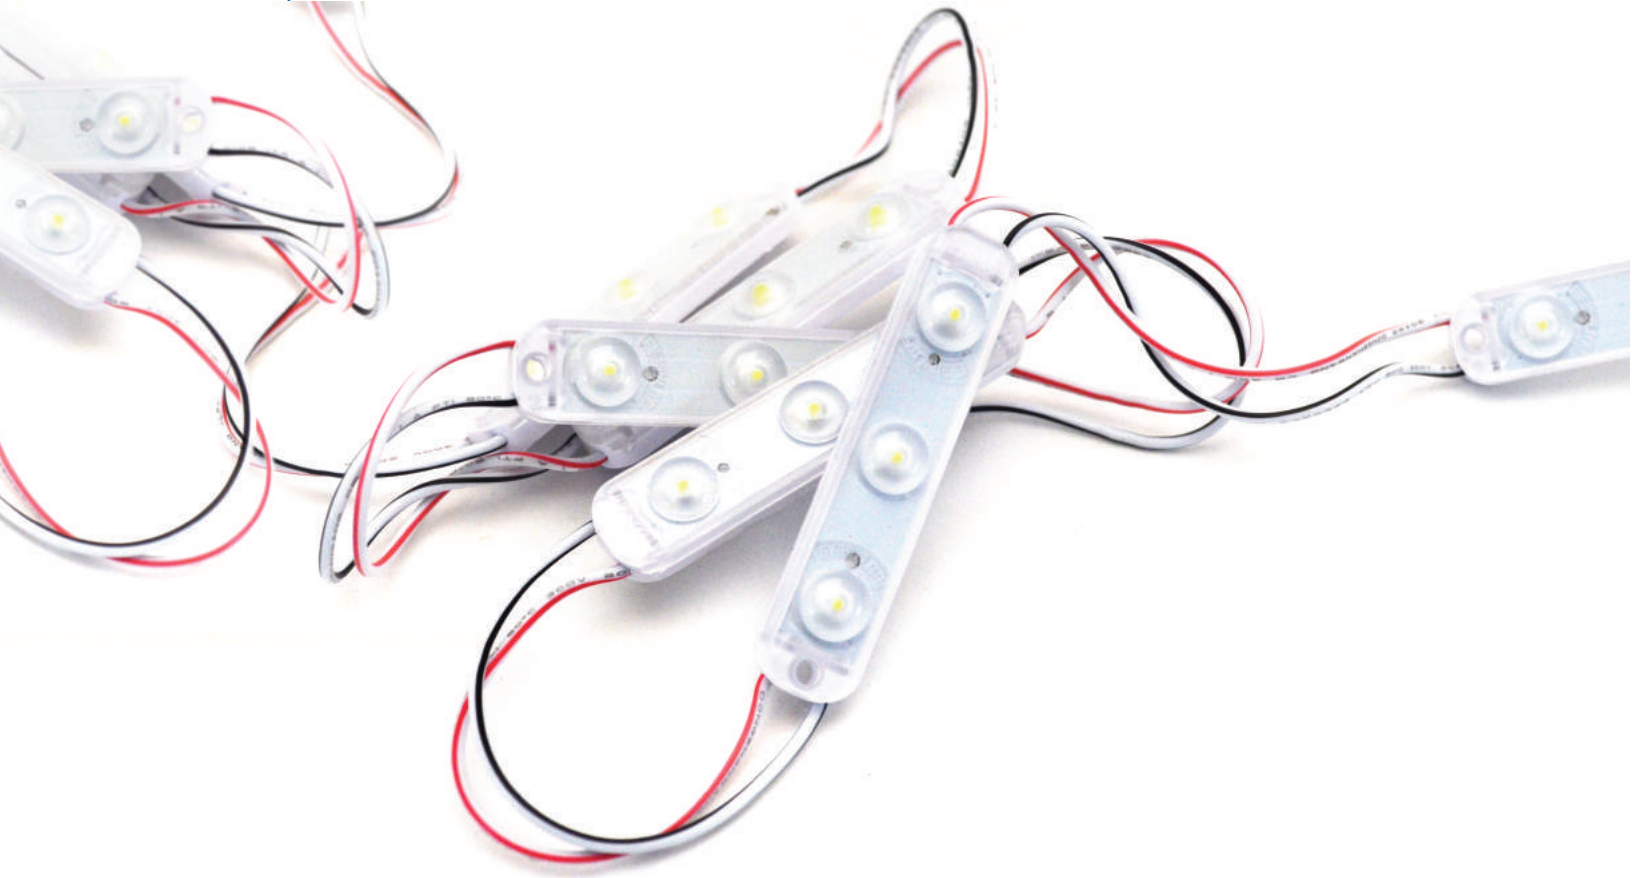

Panoramic 3D Power Gen. II

Item #	Color	Peak Wave Length	module/ft	Lm/module	Lm/ft	Lm/W	W/module	W/ft	Viewing Angle	Waterproof
PA-3D-W6CL-PW	Pure White	6500k	1.5	110	165	92	1.2	1.8	165°	IP67
PA-3D-W9CL-PW	Cool White	9000k	1.5	110	165	92	1.2	1.8	165°	IP67

Power Supply Maximum Loading Capacity

Power Supply	20W	30W	60W	100W	150W
By Module	15 m	22 m	45 m	75 m	112 m
By Footage	10 ft	15 ft	30 ft	50 ft	75 ft

Panoramic 3D Energy Gen. II

Item #	Color	Peak Wave Length	module/ft	Lm/module	Lm/ft	Lm/W	W/module	W/ft	Viewing Angle	Waterproof
PA-3D-W3VL-EG	Warm White	3000k	2	70	140	98	0.72	1.44	165°	IP67
PA-3D-W5CL-EG	Natural White	5000k	2	70	140	98	0.72	1.44	165°	IP67
PA-3D-W6VL-EG	Pure White	6500k	2	70	140	98	0.72	1.44	165°	IP67
PA-3D-W9VL-EG	Cool White	9000k	2	70	140	98	0.72	1.44	165°	IP67
PA-3D-RXCL-EG	Red	620-625nm	2	19	38	27	0.72	1.44	165°	IP67
PA-3D-GXCL-EG	Green	525-530nm	2	46	92	64	0.72	1.44	165°	IP67
PA-3D-BXCL-EG	Blue	465-470nm	2	11	22	16	0.72	1.44	165°	IP67
PA-3D-AXCL-EG	Amber	580-596nm	2	17	34	25	0.72	1.44	165°	IP67

Power Supply Maximum Loading Capacity

Power Supply	20W	30W	60W	100W	150W
By Module	25 m	37 m	75 m	125 m	188 m
By Footage	12.5 ft	18.5 ft	37.5 ft	62.5 ft	94 ft

Drawing

