



# PRINCIPAL LED

## WE SPEAK SIGN LANGUAGE

(<https://www.p-led.com>)



PRODUCTS ▾

SOLUTIONS ▾

RESOURCES ▾

WHERE TO BUY

ABOUT US

BLOG


EVENTS

CONTACT US

FAQS

[Home](https://www.p-led.com) (<https://www.p-led.com>) > [Products](https://www.p-led.com/products/) (<https://www.p-led.com/products/>) > [Product Families](https://www.p-led.com/product/families/) (<https://www.p-led.com/product/families/>) > [Street Fighter](https://www.p-led.com/product/families/street-fighter/) (<https://www.p-led.com/product/families/street-fighter/>) > [Street Fighter Middleweight](#)

## Street Fighter Middleweight

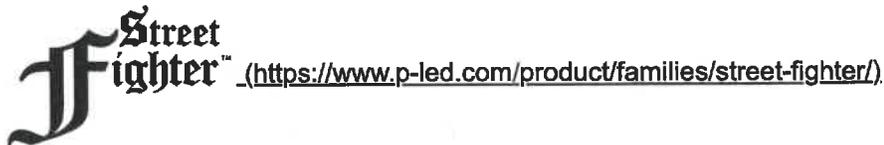


### Key Features

- Wide module spacing reduces module counts and installation time
- Great in areas with indirect water exposure or salt spray
- Features high output and optic lens
- Split wires for easy module adjustment and splicing
- LM-79/LM-80 third party tested
- VHB tape coupled with a mechanical screw-hole mounting option

Categories: [Channel Letters](https://www.p-led.com/product/solutions/channel-letters/) (<https://www.p-led.com/product/solutions/channel-letters/>), [Single Face Cabinets](https://www.p-led.com/product/solutions/cabinet-signs/single-face-cabinets/) (<https://www.p-led.com/product/solutions/cabinet-signs/single-face-cabinets/>), [Street Fighter](https://www.p-led.com/product/solutions/channel-letters/street-fighter/) (<https://www.p-led.com/product/solutions/channel-letters/street-fighter/>)

[led.com/product/families/street-fighter/](http://led.com/product/families/street-fighter/)

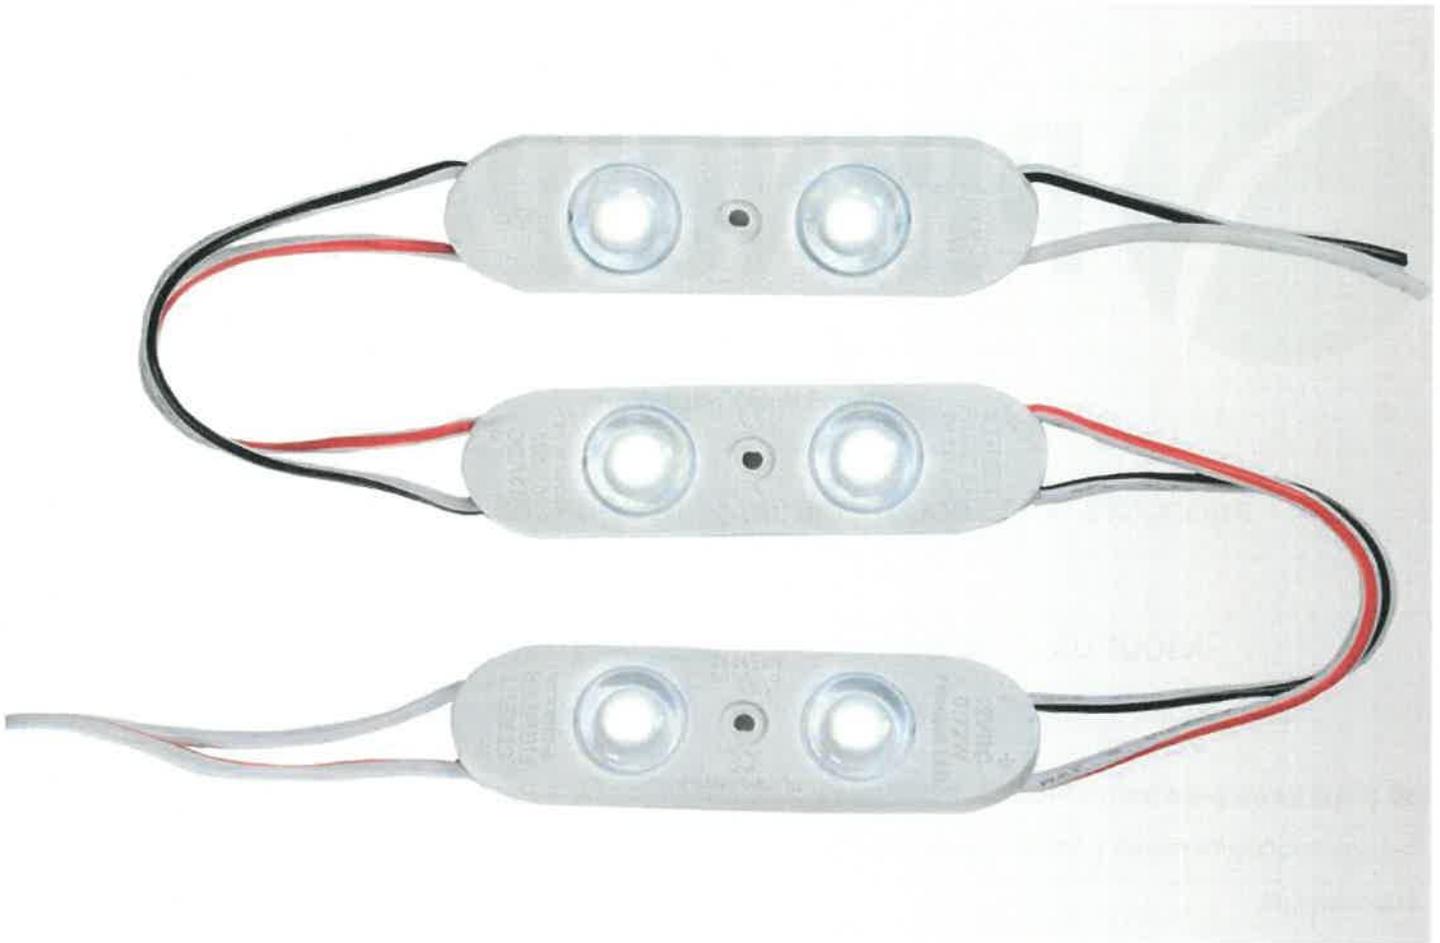

(<https://cdn.p-led.com/product-street-fighter-middleweight.jpg>)



(<https://cdn.p-led.com/product-street-fighter-middleweight-example.jpg>)

Resources	Specs	Coverage
Beam Angle	160° Low Dome, Batwing Optic	
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs	
Dimensions	0.591"W x 2.263"L x 0.383"H	

Efficacy	See Product Options
Fastening	Peel & stick / Mechanical screw hole
Input	12VDC
Intensity (TW)	See Product Options
Max Mods (Series)	40 mods (17.7 ft.)
Operating Temp	-40° to 140°F (-40° to +60°C)
Packaging	80 mods (35.5 ft.) per bag or 1,200 mods (532.5 ft.) per case
Power	0.72W/mod (1.62W/ft)
Power Supply	P-LED 12VDC
Protection Grade	IP67
Run Footage	80 mods (35.5 ft.)/60W PS
Spacing	2.25 mods/ft (fully stretched)
Warranty	10-Year Product / 5-Year Limited Labor

## Product Options

Color	CCT	Efficacy	Intensity	Part Number
Warm White	3500K	100 LM/W	72 LM/mod (162 LM/ft)	PL-OP2-MW2-P-WW (M-SFMW2-35)
Natural White	5000K	100 LM/W	72 LM/mod (162 LM/ft)	PL-OP2-MW2-P-NW (M-SFMW2-50)
True White	7000K	100 LM/W	72 LM/mod (162 LM/ft)	PL-OP2-MW2-P-TW (M-SFMW2-70)
Cool White	9000K	100 LM/W	72 LM/mod (162 LM/ft)	PL-OP2-MW2-P-CW (M-SFMW2-90)

Principal LED is adopting new Part Numbers as of June 4, 2018. These new numbers are in parenthesis, i.e. (x). We will happily work with either part number to serve our customers until further notice.

## Wiring

White/Red      Positive

White/Black      Negative

## Related products



**Street Fighter Colors**

(<https://www.p-led.com/products/street-fighter-colors/>)



**Street Fighter RGB**

(<https://www.p-led.com/products/street-fighter-rgb/>)



**Qwik Mod 1 Mini™**

(<https://www.p-led.com/products/qwik-mod-1-mini/>)



**Qwik Mod 3**

(<https://www.p-led.com/products/qwik-mod-3/>)

## Products by Solution

▶ Channel Letters (<https://www.p-led.com/product/solutions/channel-letters/>)

Cabinet Signs (<https://www.p-led.com/product/solutions/cabinet-signs/>)

▶ Single Face Cabinets (<https://www.p-led.com/product/solutions/cabinet-signs/single-face-cabinets/>)

Double Face Cabinets (<https://www.p-led.com/product/solutions/cabinet-signs/double-face-cabinets/>)

Linear & Edge Lighting (<https://www.p-led.com/product/solutions/linear-edge-lighting-architectural/>)

Retrofits (<https://www.p-led.com/product/solutions/retrofits/>)