


1. ALL DIMENSIONS ARE TO FACE OF MASONRY, FACE OF FRAMING, CENTERLINE OF DEMISING WALLS AT DWELLING UNITS, OR FACE OF INTERIOR FRAMINGS UNLESS NOTED OTHERWISE. DIMENSIONS FOR CASED OPENINGS ARE TO FINISHED SURFACE, U.N.O.

2. PREPARE ALL SURFACES TO RECEIVE SCHEDULED FINISH PER MANUFACTURERS' REQUIREMENTS AND PROJECT SPECIFICATIONS.


3. WHERE VARYING PARTITION TYPES ABUT, ADJUST LOCATION OF WALL STUDS SO THAT THE FINISH MATERIALS ON THE CONTINUOUS FACE OF THE WALL ALIGN.

ABV	— ABOVE	ENT	— ENTERING	NOM	— NOMINAL
ACI	— AMERICAN CONCRETE INSTITUTE	EP	— ELECTRICAL PANEL	NTS	— NOT TO SCALE
ACOUST	— ACOUSTIC(AL)	EQ	— EQUAL	OC	— ON CENTER
ACP	— ACOUSTICAL CEILING PANEL	EQUIP	— EQUIPMENT	OD	— OUTSIDE DIAMETER
ACT	— ACOUSTICAL CEILING TILE	EW	— EACH WAY	OFF	— OFFICE
AD	— ACCESS DOOR, AREA DRAIN	EWG	— ELECTRIC WATER COOLER	OPER	— OPERABLE
ADA	— AMERICANS WITH DISABILITIES ACT	EXH	— EXHAUST	OPH	— OPPOSITE HAND
ADJ	— ADJUSTABLE	EXIST	— EXISTING	OPNG	— OPENING
AFF	— ABOVE FINISH FLOOR	EXP	— EXPOSED	OPP	— OPPOSITE
AHU	— AIR HANDLING UNIT	EXP BLT	— EXPANSION BOLT	OZ	— OUNCES
AISC	— AMERICAN INSTITUTE OF STEEL CONSTRUCTION	EXP STR	— EXPOSED STRUCTURE	PC	— PRECAST
		EXT	— EXTERIOR	PF	— PLUMBING FIXTURE
AL	— ACOUSTIC LINED	FBO	— FURNISHED BY OWNER	PH	— PENTHOUSE
ALUM	— ALUMINUM	FBO/IBC	— FURNISHED BY OWNER/ INST. BY CONTRACTOR	PL	— PLATE
ANC	— ANCHOR			PL	— PROPERTY LINE
AP	— ACCESS PANEL	FD	— FLOOR DRAIN	PLAM	— PLASTIC LAMINATE
APC	— ARCHITECTURAL PRECAST CONCRETE	FDN	— FOUNDATION	PLBG	— PLUMBING
APPROX	— APPROXIMATELY	FE	— FIRE EXTINGUISHER	PM	— PRESSED METAL
ARCH	— ARCHITECT, ARCHITECTURAL	FEC	— FIRE EXTINGUISHER CABINET	PNL	— PANEL
ASS'Y	— ASSEMBLY	FH	— FIRE HYDRANT	PSF	— POUNDS PER SQUARE FOOT
ASTM	— AMERICAN SOCIETY FOR TESTING AND MATERIALS	FHA	— FAIR HOUSING ACT	PSI	— POUNDS PER SQUARE INCH
		FHC	— FIRE HOSE CABINET	PT, PTD	— PAINT, PAINTED
BC	— BASE CABINET	FIN	— FINISH	PVC	— POLYVINYL CHLORIDE
BC	— BRICK COURSE	FIN FL	— FINISHED FLOOR	PVMT	— PAVEMENT
BLDG	— BUILDING	FL	— FLUE	QTY.	— QUANTITY
BM	— BEAM	FLR/FLRS	— FLOOR/FLOORS	R	— RADIUS, RISER
BOM	— BOTTOM OF MULLION	FRP	— FIBERGLASS REINFORCED PLASTIC	RAG	— RETURN AIR GRILLE
BOT	— BOTTOM	FRT	— FIRE—RETARDANT TREATED	R&S	— ROD & SHELF
BOW	— BOTTOM OF WALL	FT	— FEET, FOOT	RB	— RESILIENT BASE
BRK	— BREAK, BRICK	FTG	— FOOTING	RCP	— REFLECTED CEILING PLAN
BTU	— BRITISH THERMAL UNIT	FURR	— FURRING	RD	— ROOF DRAIN
CAB	— CABINET	FWC	— FABRIC WALL COVERING	REF	— REFRIGERATOR
C/C	— CENTER TO CENTER	GA	— GAGE/GAUGE	REINF	— REINFORCED, REINFORCING
CB	— CEMENT BOARD	GALV	— GALVANIZED	REQ'D	— REQUIRED
CF	— CUBIC FEET	GFRG	— GLASS FIBER REINFORCED GYPSUM	RIG	— RIGID
CFM	— CUBIC FEET OF AIR PER MINUTE	GL	— GLASS	RM	— ROOM
CH	— CHANNEL	GR	— GRADE	RTNG	— RETAINING
CI	— CAST IRON	GWB	— GYPSUM WALL BOARD	RTU	— ROOF TOP UNIT
CJ	— CONTROL JOINT	GYP BD	— GYPSUM BOARD	RV	— ROOF VENT
CL	— CENTERLINE	H/HGT	— HEIGHT	SAG	— SUPPLY AIR GRILLE
CLG	— CEILING	H&C	— HOT & COLD	SC	— SOLID CORE
CLO	— CLOSET	HB	— HOSE BIBB	SCH/SCHED	— SCHEDULE
CLR	— CLEAR, CLEARANCE	HC	— HANDICAPPED ACCESSIBLE	SDL	— SIMULATED DIVIDED LITE
CM	— CROWN MOULD	HDW/HW	— HARDWARE	SECT	— SECTION
CMU	— CONCRETE MASONRY UNIT	HM	— HOLLOW METAL	SFF	— STANDARD FLUSH FRAME
OMP	— CORRUGATED METAL PIPE	HORIZ	— HORIZONTAL	SHT	— SHEET
CO	— CASED OPENING	HND	— HAND	SIM	— SIMILAR
COL	— COLUMN	HR	— HOUR	SPEC	— SPECIFICATIONS
COMM	— COMMUNICATION	HTG	— HEATING	SQ FT	— SQUARE FOOT
COMPR	— COMPRESSOR	HVAC	— HEATING/VENTILATING/AIR CONDITIONING	SQ IN	— SQUARE INCH
CONC	— CONCRETE			SQ YD	— SQUARE YARD
COND	— CONDENSER, CONDENSING	IBC	— INSTALLED BY CONTRACTOR, INTERNATIONAL BUILDING CODE	SS	— STAINLESS STEEL
CONF	— CONFERENCE			ST	— STONE
CONN	— CONNECTION	ID	— INTERIOR DESIGNER, INSIDE DIAMETER	STD	— STANDARD
CONSTR.	— CONSTRUCTION	IN	— INCH(ES)	STL	— STEEL
CONT	— CONTINUATION	INFO	— INFORMATION	STOR	— STORAGE
CPT	— CARPET	INSUL	— INSULATION	STRUCT	— STRUCTURAL
CRS	— COURSE	INT	— INTERIOR	SYN	— SYNTHETIC
CT	— CERAMIC TILE	INV	— INVERT	T	— TREAD
CTR	— CENTER	JB	— JUNCTION BOX	T&B	— TOP & BOTTOM
CTS	— COATS	JT	— JOINT	T&G	— TONGUE & GROOVE
CTSK/CSK	— COUNTERSUNK	L	— LONG	TDL	— TRUE DIVIDED LITE
CU FT	— CUBIC FOOT	LAM	— LAMINATED	TEL	— TELEPHONE
CY	— CUBIC YARD	LAV	— LAVATORY	THD	— THREAD
D	— DRYER	LBS	— POUNDS	THK	— THICK
DBL	— DOUBLE	LF	— LINEAL FOOT	TLT	— TOILET
DEG	— DEGREE	LG	— LONG	TOC	— TOP OF CONCRETE
DEPT	— DEPARTMENT	LL	— LOWER LEVEL	TOM	— TOP OF MULLION
DET	— DETAIL(S)	LLH	— LONG LEG HORIZONTAL	TOMO	— TOP OF MASONRY OPENING
DF	— DRINKING FOUNTAIN	LTG	— LIGHTING	TOP	— TOP OF PAVEMENT
DIA	— DIAMETER	LVL	— LEVEL	TORO	— TOP OF ROUGH OPENING
DIM	— DIMENSION	M/MECH	— MECHANICAL	TOS	— TOP OF STEEL
DISP	— DISPENSER, DISPOSER	MAS	— MASONRY	TYP	— TYPICAL
DL	— DEAD LOAD	MAN	— MANUAL	UL	— UNDERWRITERS LABORATORY
DMPR	— DAMPER	MAT'L	— MATERIAL	UNO	— UNLESS NOTED OTHERWISE
DN	— DOWN	MAX	— MAXIMUM	VB	— VINYL BASE
DR	— DOOR	MFR/MFG	— MANUFACTURER/MANUFACTURING	VCT	— VINYL COMPOSITION TILE
DRN	— DRAIN	MEP	— MECHANICAL/ELECTRICAL/PLUMBING	VERT	— VERTICAL
DS	— DOWNSPOUT	MW			


	EARTH
	GRAVEL, STONE
	CRUSHED STONE
	COMPACTED FILL, EARTH
	CONCRETE
	PRECAST CONCRETE
	CONCRETE MASONRY UNIT
	BRICK
	MARBLE
	GRANITE
	SAND, GROUT, MORTAR, PLASTER
	SHIM
	WOOD BLOCKING
	FINISHED WOOD
	PLYWOOD
	RIGID INSULATION
	BATT INSULATION
	CEMENT TILE, QUARRY TILE
	CERAMIC TILE (SECTION)
	STEEL
	ALUMINUM
	ACOUSTIC TILE
	GYPSUM WALLBOARD
	GLASS
	CAULKING, SEALANT



INDICATES PART'N TYPE (SEE A7.1)
ALL PARTITIONS ARE TYPE 1, U.N.O

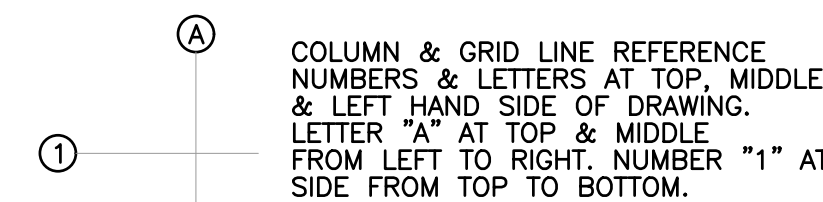

STAIR DIRECTION, ARROW INDICATES

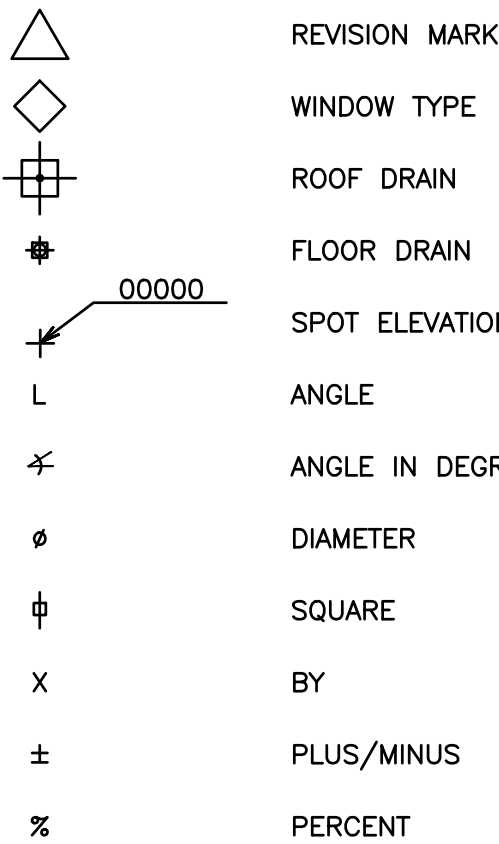

1215 CAMERON STREET
ALEXANDRIA, VA
22314

T - 703.836.3205
F - 703.548.4779
admin@rustorling.com
www.rustorling.com

CADENCE AT PARK
VIENNA, VIRGINIA

20.014

[illegible]

FOR PERMIT
01.08.21

GENERAL NOTES AND LEGENDS

SHEET NO.

A010