

Type: Job Name:

CSS | SM

SPECIFICATION CODE

CSS selections only³

| | | | | | | | | | | | | | | |
|-------|-------|--------------|----------|--------|---------|---------------|-----------------|----------|-----------------------|---------------------|-----------------|------------------------|---------|---------|
| model | light | color engine | diameter | finish | voltage | Direct Driver | InDirect Driver | mounting | standard cable length | standard cord color | standard canopy | standard canopy finish | options | options |
|-------|-------|--------------|----------|--------|---------|---------------|-----------------|----------|-----------------------|---------------------|-----------------|------------------------|---------|---------|

| Model | Direct Light Output | In-Direct Light Output | Direct Color Temp | In-Direct Color Temp | Nominal Diameter | Finish | Voltage | Direct Driver | InDirect Driver | Mounting | Options |
|---|--|--|--|---|--|--|--|---|---|---|---|
| MIC-DR- 3" edge profile Direct | SLO - Standard Lumen Output | SLO - Standard Lumen Output | 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K | 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K | 24 - 24" 30 - 36" 36 - 36" 48 - 48" | Powder Coat WMT - White Matte Texture | 120 277 347² | EB - Electronic (standard) | EB - Electronic (standard) | CSS - Cable Suspended (36" standard) | <div style="border: 1px solid black; padding: 2px;"> CSS Cable Length¹ Cord Color¹ Canopy¹ Canopy Finish¹ </div> |
| MIC-DR/IN- 3" edge profile Direct/Indirect | HLO - High Lumen Output CLO^{4,5} - Custom Lumen Output | HLO - High Lumen Output CLO^{4,5} - Custom Lumen Output | | RGB⁵ - color changing SR - Static Red SB - Static Blue SG - Static Green option | | BMT - Black Matte Texture SMT - Silver Matte Texture CUP - Custom³ | D1 - 1% (nom) 0-10V | D1 - 1% (nom) 0-10V | DMX - DMX control for RGB | CSS-M - Cable Suspended Mono Point (36" standard) SM - Surface Mount | |

NOTES

- see CSS options for selections
- available for EB, D1 drivers only
- contact factory for custom finish
- available for EB and D1 drivers only
- Contact Factory

CSS Options

| Cable Length | Power Cord Color | Canopy | Canopy Finish |
|----------------------------|----------------------------|---|---------------------------------------|
| 36 - 36" (standard) | W - White | STND - Bracket bar w/5" round canopy | MW - Matte White |
| 72 - 72" | B - Black | | SMT - Silver Matte Texture |
| 120 - 120" | G - Gray (standard) | NC - No canopy 1/4-20 side exit cable gripper (1/4-20 stud provided by others) | FB - Flat Black |
| | | CU - Custom (contact factory) | CUP - Custom (contact factory) |

Option Code

Options

2CKT - 2 Circuit

EM² - Remote Inverter option

Fixture Performance

(Delivered Lumens and Fixture Input Wattage)

¹preliminary testing, subject to change

MIC-DR/IN-2' (4000K) 25% Indirect / 75% Direct

SLO-SLO - 6870 lm @ 62.16 watts
HLO-HLO - 13741 lm @ 124 watts
CLO - Custom Lumen Output -Contact Factory

MIC-DR-2' (4000K)

SLO-SLO - 4536 lm @ 42 watts
HLO-HLO - 9072 lm @ 84 watts
CLO - Custom Lumen Output - Contact Factory

MIC-DR/IN-3' (4000K) 25% Indirect / 75% Direct

SLO-SLO - 15231 lm @ 138.6 watts
HLO-HLO - 30462 lm @ 277 watts
CLO - Custom Lumen Output -Contact Factory

MIC-DR-3' (4000K)

SLO - 11,334 lm @ 105 watts
HLO - 22,668 lm @ 210 watts
CLO - Custom Lumen Output - Contact Factory


MIC-DR/IN-4' (4000K) 25% Indirect / 75% Direct

SLO-SLO - 27,382 lm @ 250 watts
HLO-HLO - 54,765 lm @ 399 watts
CLO - Custom Lumen Output -Contact Factory

MIC-DR-4' (4000K)

SLO - 21,500 lm @ 200 watts
HLO - 43,000 lm @ 500 watts
CLO - Custom Lumen Output - Contact Factory

Dimensions

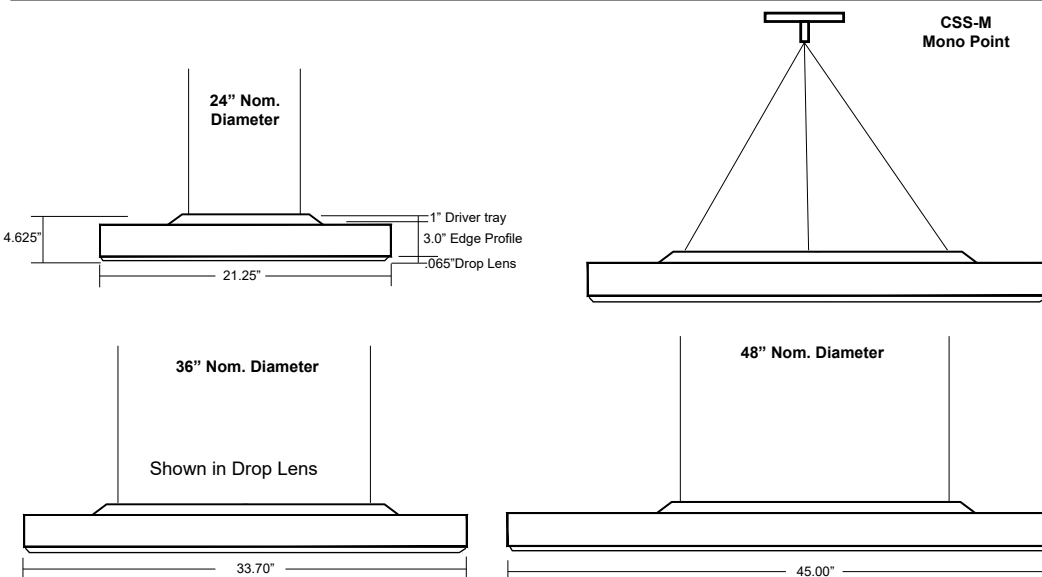

V-0719